

MONTGOMERY COUNTY PLANNING DEPARTMENT

BICYCLE FACILITY DESIGN TOOLKIT

MAY 2018



 MONTGOMERY COUNTY PLANNING DEPARTMENT

Table of Contents

Introduction	3	Bike Boxes	30
Bikeway Facility Types	4	Raised Driveways	31
Bicycle Facility Classification	5	Separated Bike Lanes: Bike Crossings	32
Trails	6	Details on Separated Bike Lanes	34
Off-Street Trails	7	Separated Bike Lane Zones	35
Stream Valley Park Trails	8	Separated Bike Lane Widths	36
Separated Bikeways	9	Determining Separated Bike Lane Zone Widths in Constrained Corridors	37
Sidepaths	10	Separated Bike Lanes: One-Way at Sidewalk Level	38
Separated Bike Lanes	11	Separated Bike Lanes: One-Way at Intermediate Level	39
Striped Bikeways	12	Separated Bike Lanes: One-Way at Street Level	40
Buffered Bike Lanes	13	Separated Bike Lanes: Two-Way at Sidewalk Level	41
Conventional Bike Lanes	14	Separated Bike Lanes: Two-Way at Intermediate Level	42
Advisory Bike Lanes	15	Separated Bike Lanes: Two-Way at Street Level	43
Bikeable Shoulders	16	Neighborhood Greenway Treatments	44
Bikeable Shoulders	17	Traffic Calming via Raised Pavement	45
Shared Roads	18	Traffic Calming via Street Narrowing	46
Shared Streets	19	Traffic Diversion	47
Neighborhood Greenways	20	Crossing Treatments	48
Priority Shared Lanes	21	Freeway Crossing Treatments	50
Intersection Treatments	22	Overpass / Underpass Between In- terchanges on an Existing Road	51
Protected Intersections	23	Overpass / Underpass Be- tween Interchanges on a Trail	52
Transition from One-Way Separated Bike Lane to Conventional Bike Lane on Intersecting Street	24	Signalized Treatments at Entrance Ramps	53
Transition from One-Way Separated Bike Lane to Conventional Bike Lane on the Same Street	25	Signalized Treatments at Exit Ramps	54
Transition from One-Way Separated Bike Lanes to Intersecting Street with Two-Stage Turn Queue Box	26	Unsignalized Treatments at Entrance Ramps	55
Transition from Two-Way Separated Bike Lanes to One-Way Separated Bike Lanes on Same Street	27	Unsignalized Treatments at Exit Ramps	56
Transition from Two-Way Separated Bike Lanes to One-Way Separated Bike Lane on Intersecting Street	28	Other	58
Transition from Two-Way Separated Bike Lanes to Conventional Bike Lane on Intersecting Street	29	Floating Transit Islands	59

INTRO

The Montgomery County Planning Department's Bicycle Facility Design Toolkit provides an overview of the types of bicycle facilities recommended in the Bicycle Master Plan. It is divided into six parts:

- 1 Bikeway Facility Types
- 2 Additional Guidance on Separated Bike Lanes
- 3 Additional Guidance on Neighborhood Greenways
- 4 Intersections Treatments
- 5 Freeway Crossing Treatments
- 6 Other

The toolkit profiles best practices for bicycle facility design and application as described in the National Association of Cities and Transportation Officials (NACTO) Urban Bikeway Design Guide, 2nd Edition, the Federal Highway (FHWA) Separated Bike Lane Planning and Design Guide, the Massachusetts Department of Transportation (MassDOT) Separated Bike Lane Planning and Design Guide, and the American Association of State Highway Transportation Officials (AASHTO) Guide for the Development of Bicycle Facilities, 4th Edition.

The toolkit's purpose is to provide guidance to designers and planners and is not intended to take the place of design standards prepared by the Montgomery County Department of Transportation or the Maryland State Highway Administration.

Key principles assumed in the toolkit are that:

- The bicycling network should accommodate people of all ages and bicycling abilities.
- Bicycle travel on all streets should be safe, continuous, direct and convenient.

BIKEWAY FACILITY TYPES



BICYCLE FACILITY CLASSIFICATION

MOST



OFF-STREET TRAILS

STREAM VALLEY PARK TRAILS

NEIGHBORHOOD CONNECTOR



SIDEPATHS

SEPARATED BIKE LANES

SEPARATION FROM TRAFFIC



BUFFERED BIKE LANES

ADVISORY BIKE LANES

BIKE LANES

CONTRA FLOW BIKE LANES



SHARED STREETS

NEIGHBORHOOD GREENWAYS

PRIORITY SHARED LANE MARKINGS

LEAST





Capital Crescent Trail

TRAILS



OFF-STREET
TRAILS


STREAM
VALLEY PARK
TRAILS

NEIGHBOR-
HOOD
CONNECTOR

OFF-STREET TRAILS

Off-street trails are shared use paths located outside of the road right-of-way and provide two-way travel for people walking, bicycling and other non-motorized users. Trails specifically along stream valleys are discussed in the stream valley park trails section (page 8).

OFF-STREET TRAILS

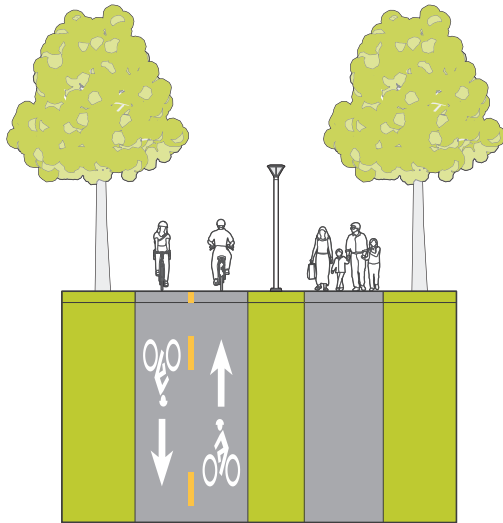

TYPICAL APPLICATION

Off-street trails can be located along railway or utility corridors, land dedicated for planned but unbuilt “paper” streets and through public land.

GUIDANCE

- The minimum paved width for a trail is 10 feet. Anticipated future traffic volumes should be used to guide design decisions. The minimum width to enable side-by-side travel and passing is 11 feet.
- Maximum grade should not exceed 5 percent. Grades less than 0.5 percent should be avoided.
- Ideally, provide a graded shoulder area of 3 - 5 feet.
- Lighting should be provided at path/roadway intersections at a minimum and at other locations where personal security may be an issue or where nighttime use is likely to be high.
- Sight distances are based on site conditions and user-based factors. Ensure sight distances are designed per the AASHTO Bike Guide.
- Provide protective railings/fences at 42 inches high if the trail is adjacent to a steep slope.

CONSIDERATIONS

- Trails expected to serve a high percentage of pedestrians (30 percent or more) or be used by large maintenance vehicles should be wider than 10 feet.
- Trails with high use may require pedestrian and bicycle separation. This separation can take the form of pavement markings or separate parallel paths for each user group. If separation is achieved by pavement markings, the bicycle side of the pathway should be no less than 10 feet wide and the pedestrian side should be no less than 5 feet wide.
- Trails on steep grades (3 to 5 percent) should be wider to account for higher bicycle speed in the downhill direction and additional space for faster bicyclists to pass slower bicyclists and pedestrians in the uphill direction.
- On sections with long steep grades, provide periodic sections with a flat grade to permit users to stop and rest.
- Lighting should be pedestrian-scale, with fixtures located about 15 feet above the trail and with 0.5 to 2.0 foot candles.
- Where lighting is not provided, reflective edge lines should be marked on the pavement.

REFERENCES


AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.

United States Access Board. *Accessibility Guidelines for Pedestrian Facilities in the Public Right-of-Way; Shared Use Paths*. Washington, DC, February, 2013. <https://www.access-board.gov/guidelines-and-standards/streets-sidewalks/shared-use-paths/supplemental-notice>

STREAM VALLEY PARK TRAILS

Stream valley park trails are shared use paths located within a M-NCPPC stream valley park that provide two-way travel for people walking and bicycling, and other non-motorized users.

NEIGHBORHOOD CONNECTOR

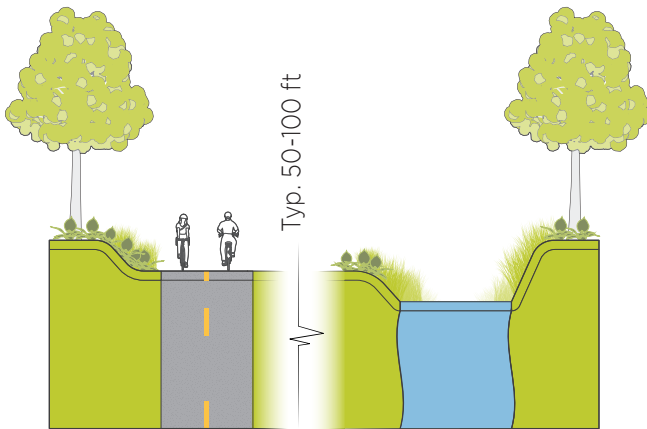

TYPICAL APPLICATION

Stream valley park trails in Montgomery County include Rock Creek Trail, Matthew Henson Trail and Sligo Creek Trail.

GUIDANCE

Stream valley park trails are often located in environmentally sensitive areas. This location will affect design/construction in a number of ways:

- Alignment should avoid or minimize impacts to sensitive natural resources, such as floodplains, stream buffers, steep slopes, highly erodible soils, wetlands and rare, threatened and endangered (RTE) habitat. Alignment should also avoid and/or minimize impacts to cultural, historical and archeological resources.
- To reduce disturbance during trail construction/enhancement, follow existing land contours and reduce the use of grading to the extent possible.
- Distance between the trail and stream is typically 50 to 100 feet to avoid construction in the 100-year floodplain where feasible.

CONSIDERATIONS

- Adequate sight distance may be difficult to achieve along stream valley park trails due to natural features, like trees or rock outcroppings.
- These trails may be disconnected from surrounding neighborhoods due to topography and the existing street grid. To improve connectivity and access, consider providing bridges or trail spurs to connect to nearby bicycle corridors, trails and neighborhood streets.
- Care should be taken at street intersections to ensure crossings are logical, sightlines are adequate, and transitions to on-street bikeways are provided.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.
Amended Countywide Park Trails Plan. 2016



Separated Bike Lanes on Woodglenn Drive, North Bethesda

SEPARATED BIKEWAYS



SEPARATED BIKEWAYS



SIDEPATHS




SEPARATED
BIKE
LANES


SIDEPATHS

Sidepaths are shared use paths located parallel to and within the road right-of-way, providing two-way travel for walking, bicycling, jogging and skating.

SIDEPATHS

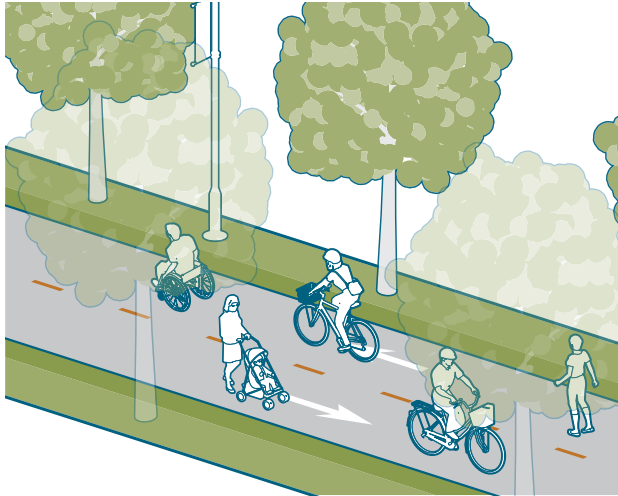

Sidepath with mixed use

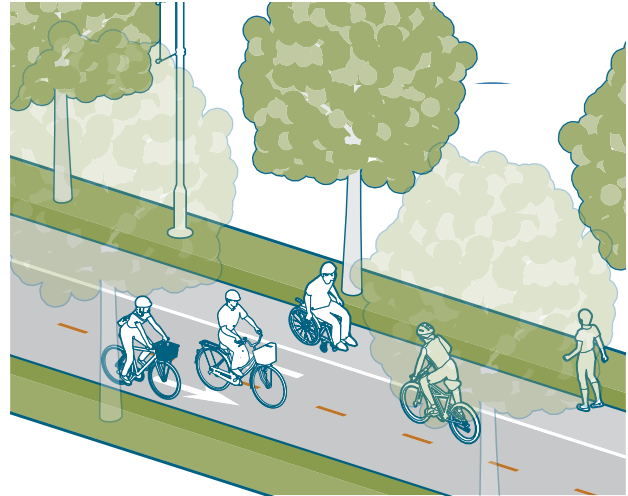

Sidepath with separate uses

TYPICAL APPLICATION

Generally considered on any road with one or more of the following characteristics:

- Total traffic lanes: 3 lanes or greater.
- Posted speed limit: 30 mph or faster.
- Average daily traffic: 6,000 vehicles or greater.
- Parking turnover: frequent.
- Bike lane obstruction: likely to be frequent.
- Designated as truck or bus routes.

Sidepaths may be preferable to separated bike lanes if low pedestrian volumes are anticipated in order to minimize right-of-way impacts.

GUIDANCE

- A minimum of a 2 foot graded area with clearance from lateral obstructions, such as bushes, large rocks, bridge piers, abutments and poles.
- A minimum 1 foot clearance from “smooth” features, such as bicycle railings or fences with appropriate flaring and treatments.
- Ideally, a graded shoulder area of 3 - 5 feet, with a 5 foot minimum buffer from traffic.

- Separation of modes in areas with existing or anticipated higher levels of activity, including a 10 foot (min) bikeway and a 5 foot (min) walkway.
- Adequate widths to enable side-by-side travel and passing, typically at least 11 feet wide.

CONSIDERATIONS

Sidepaths are attractive to a wider range of bicyclists compared to striped bikeways (see pages 12-15). Sidepath design requires:

- High-quality construction and maintenance that avoids pavement cracking and buckling.
- Asphalt is the preferred surface material. If concrete, use longer sections with small joints for a smoother riding experience.
- Intuitive and safe intersection crossings.
- Straight alignments to allow direct and higher speed travel.
- Removal of poles, trees or other obstructions that are present in many existing sidepath locations.
- Adequate lighting for nighttime use.

REFERENCES


MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.

SEPARATED BIKE LANES

Separated bike lanes are exclusive bikeways that combine the user experience of a sidepath with the on-street infrastructure of a conventional bike lane. They are physically separated from motor vehicle traffic and distinct from the sidewalk.

SEPARATED
BIKE
LANES

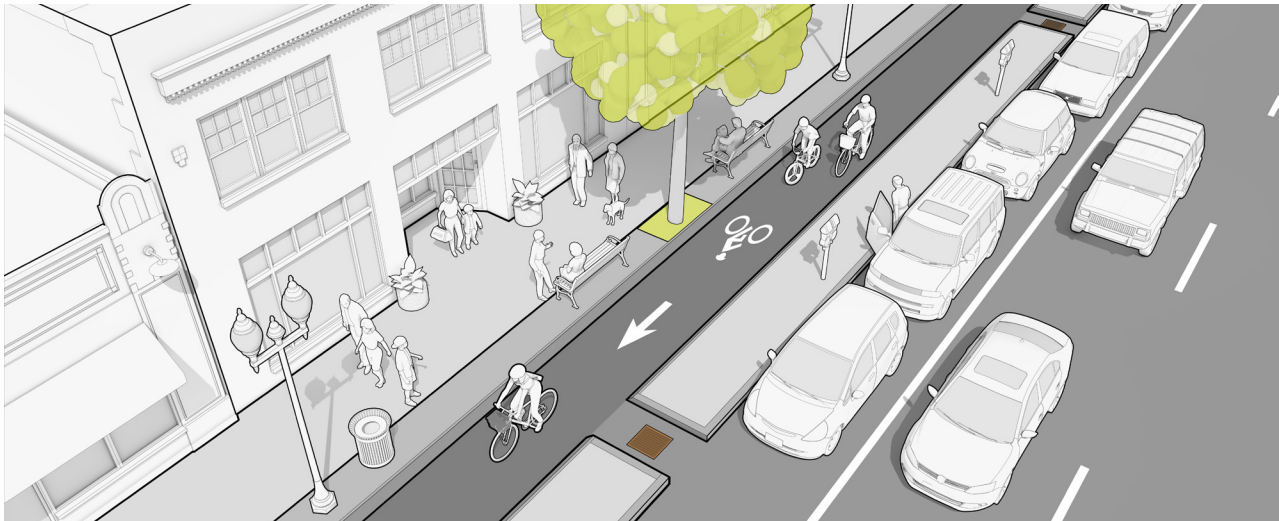

TYPICAL APPLICATION

Considered on any road with one or more of the following characteristics:

- Total traffic lanes: 3 lanes or greater.
- Posted speed limit: 30 mph or faster.
- Average daily traffic: 6,000 vehicles or greater.
- Parking turnover: frequent.
- Bike lane obstruction: likely to be frequent.
- Designated as truck or bus routes.

Preferred in higher density areas, adjacent to commercial and mixed-use development, and near major transit stations or locations where observed or anticipated pedestrian volumes will be higher.

GUIDANCE

On roads with two to four through lanes, one-way directional separated bike lanes are preferred to a two-way separated bike lane on one side of the street for the following reasons:

- Follow normal traffic flows, whereas two-way separated bike lanes can create unexpected movements.
- Simpler transitions to other facilities.

- Less likely need for signal modifications.

Separated bike lanes can provide different levels of separation:

- Flexible delineator posts (“flex posts”) offer the least separation and are appropriate as an interim solution.
- Raised buffers provide the greatest level of separation from traffic, but will often require road reconstruction.
- On-street parking offers a high-degree of separation, but may require raised buffer treatments at intersections.

See pages 38-43

CONSIDERATIONS

- More attractive to a wider range of bicyclists than striped bikeways on higher volume and faster speed roads.
- Prevent motor vehicles from driving, stopping or waiting in the bikeway.
- Provide greater comfort to pedestrians by separating them from bicyclists.

REFERENCES

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

NACTO. *Urban Bikeway Design Guide*. 2nd Edition.



Bike Lanes on Battery Lane, Bethesda

STRIPED BIKEWAYS



STRIPED BIKEWAYS

BUFFERED
BIKE LANES

BIKE
LANES


ADVISORY
BIKE LANES

CONTRA
FLOW
BIKE LANES

BUFFERED BIKE LANES

Buffered bike lanes are conventional bike lanes paired with a designated buffer space separating the bike lane from the adjacent motor vehicle travel lane and/or parking lane to increase the comfort of bicyclists.

BUFFERED BIKE LANES

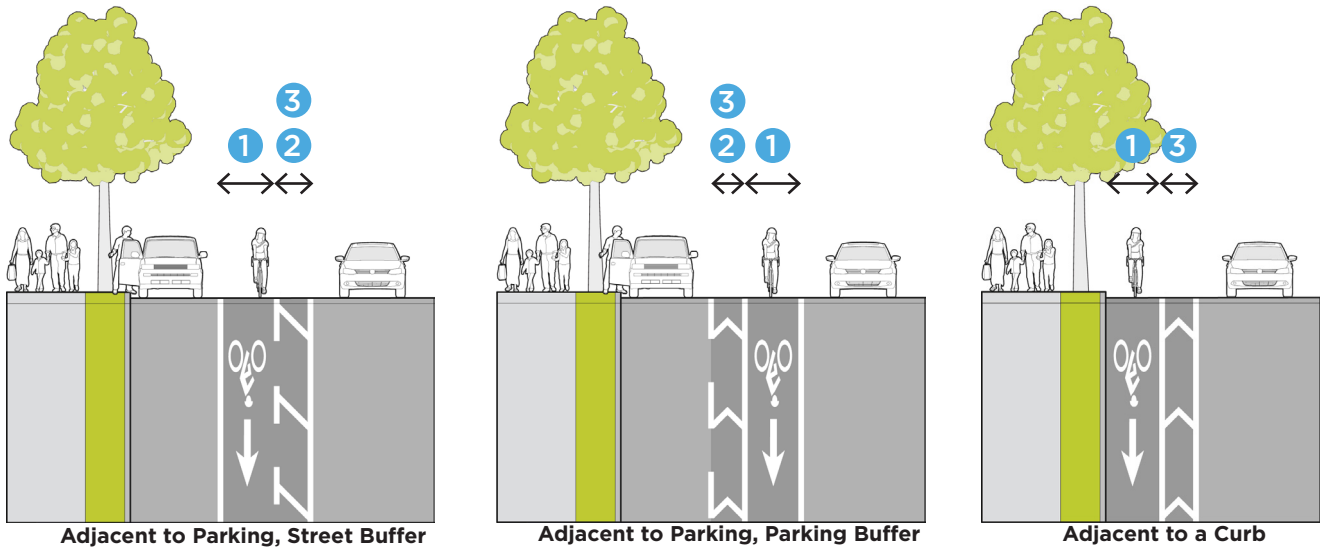

TYPICAL APPLICATION

Considered on any road with one or more of the following characteristics:

- Total traffic lanes: 3 lanes or fewer.
- Posted speed limit: 30 mph or slower.
- Average daily traffic: 9,000 vehicles or fewer.
- Parking turnover: infrequent.
- Bike lane obstruction: likely to be infrequent.
- Where a separated bike lane or sidepath is infeasible or undesirable.

GUIDANCE

- 1 Minimum buffered bike lane width, exclusive of buffer, is 4 feet with a parking-adjacent buffer and 5 feet with a travel-lane-adjacent buffer or where bike lane is adjacent to curb. Desirable width is 6 feet.
- 2 Buffers should be broken along curbside parking to allow cars to cross the bike lane.

- 3 Minimum buffer width is 2 feet. There is no maximum. Diagonal crosshatching should be used for buffers less than 3 feet wide. Chevron crosshatching should be used for buffers greater than 3 feet.

CONSIDERATIONS

- Consider placing buffer next to parking lane where there is high turnover parking.
- Consider placing buffer next to travel lane where speeds are 30 mph or faster, or when traffic volume exceeds 6,000 vehicles per day.
- Preferable to conventional bike lanes when used as a contra-flow bike lane on one-way streets.
- Can be used on one-way or two-way streets.
- Where there is 7 feet of roadway width available, a buffered bike lane should be installed instead of a conventional bike lane.
- If there is sufficient width and a separated bike lane is not being considered, buffers may be installed on both sides of the bike lane.
- Allow bicyclists to ride side by side or to pass slower moving bicyclists.
- Research has documented buffered bike lanes increase safety and the perception of safety.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.


NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

Portland State University, Center for Transportation Studies. *Evaluation of Innovative Bicycle Facilities: SW Broadway Cycle Track & SW Stark/Oak Street Buffered Bike Lanes FINAL REPORT*. 2011.

CONVENTIONAL BIKE LANES

A conventional bike lane is a portion of a street designated for the exclusive use of bicycles and distinguished from traffic lanes by striping, signing and pavement markings.

BIKE LANES

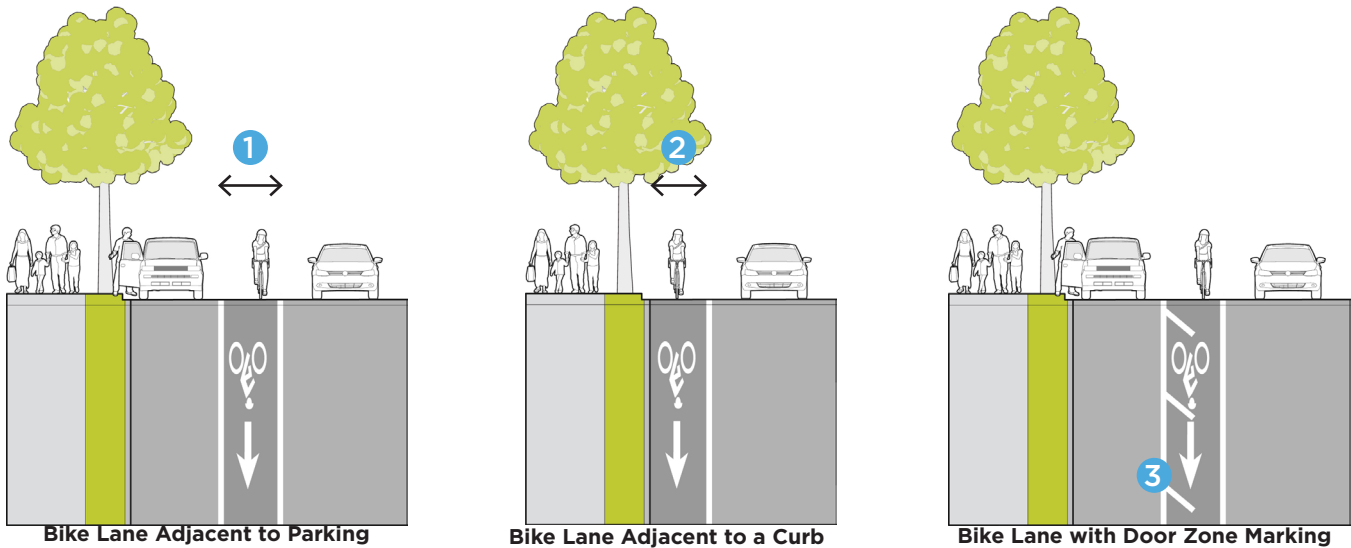

TYPICAL APPLICATION

Conventional bike lanes will generally be considered on any road with one or more of the following characteristics:

- Total traffic lanes: 3 lanes or fewer.
- Posted speed limit: 30 mph or slower.
- Average daily traffic: 9,000 vehicles or fewer.
- Parking turnover: infrequent.
- Bike lane obstruction: likely to be infrequent.

Where a separated bike lane or sidepath is infeasible or undesirable.

CONSIDERATIONS

- Typically installed by reallocating street space.
- Can be used on one-way or two-way streets.
- Contra-flow bike lanes may be used to allow two-way bicycle travel on one-way streets for motorists, improving bicycle network connectivity.
- Stopping, standing and parking in bike lanes may be problematic in areas of high parking demand and deliveries, especially in commercial areas.
- Wider bike lanes or buffered bike lanes are preferred at locations with high parking turnover.

GUIDANCE

- 1 The minimum width of a bike lane adjacent to parking is 5 feet, a desirable width is 6 feet.
 - 2 The minimum width of a bike lane adjacent to a curb is 5 feet exclusive of a gutter, a desirable width is 6 feet.
 - 3 Parking Ts or hatch marks can highlight the vehicle door zone on constrained corridors with high parking turnover to guide bicyclists away from doors.
- See the NACTO and AASHTO design guides for more information on bike lane widths.


REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.
NACTO. *Urban Bikeway Design Guide*. 2nd Edition.


ADVISORY BIKE LANES

Advisory bike lanes are dashed bike lanes that allow motorists to temporarily enter the bike lane to provide sufficient space for oncoming traffic to safely pass on narrow unlaned roads in residential contexts.

ADVISORY BIKE LANES

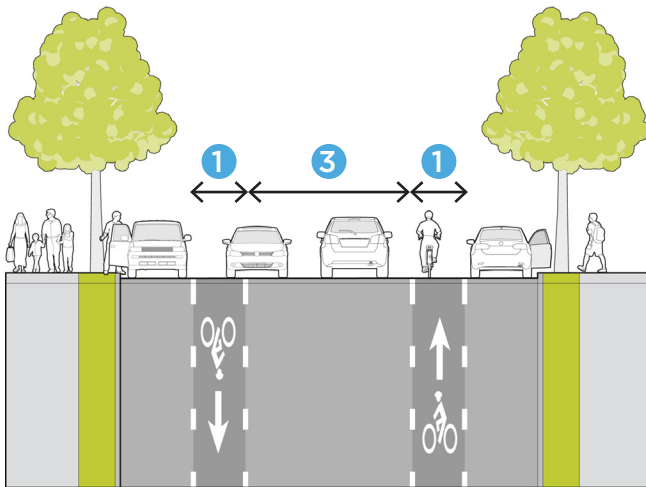

Advisory Bike Lane with Parking

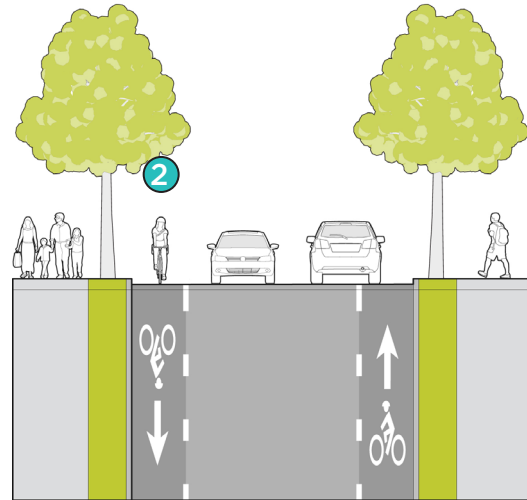

Advisory Bike Lane without Parking

TYPICAL APPLICATION

Advisory bike lanes will generally be considered on any road with one or more of the following characteristics:

- Total traffic lanes: 2 lanes or fewer.
- Posted speed limit: 30 mph or slower.
- Average daily traffic: 2,000-4,000 vehicles per day desirable, 6,000 vehicles per day or 300 vehicles or fewer maximum during the peak hour.
- Parking turnover: infrequent.
- Street is not a designated truck or bus route.

GUIDANCE

- 1 The minimum width of an advisory bike lane is:
 - 5 feet adjacent to parking.
 - 4 feet curb-adjacent exclusive of gutter.
- 2 A desirable width is 6 feet.
- 3 The minimum width of the unlaned motorist space should be 12 feet between the bike lanes. The maximum width should be 18 feet.

CONSIDERATIONS

- **Requires FHWA permission to experiment.**
- For use on streets too narrow for bike lanes and normal width travel lanes.
- Provide two separate minimum width bike lanes, on either side of a single shared (unlaned) two-way “yielding” motorist travel space.
- Motorists must yield to on-coming motor vehicles by pulling into the bike lane.
- This treatment should only be used on streets with greater than 60 percent continuous daytime parking occupancy.
- Where parking occupancy is continuously less than 50 percent, consolidate the parking to one side of the street.
- A two-way traffic warning sign (W6-3) may increase motorists understanding of the intended two-way operation of the street.
- The combined bike lanes and unlaned travel area must meet the minimum requirements set out by the fire code.



MUTCD W6-3 Sign

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.

FHWA. *Bicycle Facilities and the Manual on Uniform Traffic Control Devices - Dashed Bicycle Lanes*. 2015.




Bikeable Shoulders On Clarksburg Road in Boyds.

BIKEABLE SHOULDERS



BIKEABLE SHOULDERS

Bikeable shoulders are portions of the roadway that accommodate stopped or parked vehicles, emergency use, bicycles, motor scooters and pedestrians where sidewalks do not exist.

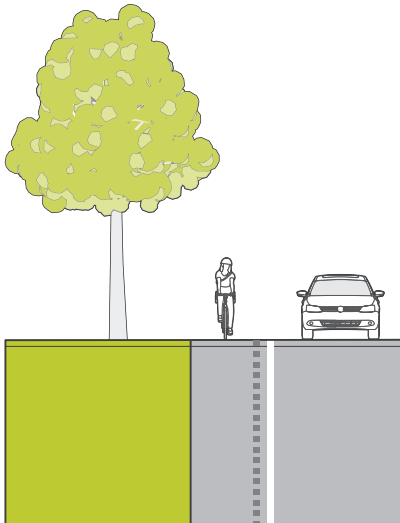

TYPICAL APPLICATION

Rural areas of Montgomery County where dedicated bikeways either will not fit on the street or would not be appropriate given the surrounding context.

GUIDANCE

- Shoulder width should be at least 4 feet if the roadway is curbless and there are no vertical obstructions. If curbs or vertical obstructions are present, shoulder width should be 5 feet minimum exclusive of the gutter if present.
- Shoulders should be wider on roads with high levels of bicycle traffic to accommodate bicyclist passing and facilitate side-by-side bicycling.
- When posted speed limits or 85th percentile speeds exceed 50 mph and/or if heavy vehicles frequently use the road, shoulders should exceed minimum widths to enhance bicyclist comfort.
- The width of a shoulder with rumble strips should be measured from the rightmost side of the rumble strip. Periodic gaps should be provided to allow bicyclists to move across the strip pattern.
- Edge line rumble strips can provide additional bicyclist space on paved shoulders.

CONSIDERATIONS

- For roads that are unable to provide consistent and standard size bikeable shoulders in both directions, prioritize:
 - The uphill direction on hilly roads to reduce conflicts between slow-moving bicyclists and fast-moving motor vehicles.
 - The inside of a horizontal curve and/or the downgrade of a vertical curve where sight distance is restricted.
- Paved shoulders should be considered on roadways popular with recreational bicyclists that have significant motor vehicle traffic during periods when recreational bicycling is known to occur.
- Bicyclists will not use a shoulder if it is covered in gravel, glass and other road debris, so regular street sweeping is important.
- In rural areas, paved shoulders can also provide space for pedestrians on roadways without sidewalks. In situations where a shoulder is intended for pedestrian use, it must comply with the Americans with Disabilities Act or seek a waiver.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2012.

FHWA. *Achieving Multimodal Networks: Applying Design Flexibility and Reducing Conflicts*. 2016.



SHARED ROADS



SHARED ROADS



SHARED
STREETS



NEIGHBOR-
HOOD
GREENWAYS



PRIORITY
SHARED
LANE
MARKINGS

SHARED STREETS

Shared streets prioritize pedestrian and bicycle movement by slowing vehicular speeds and communicating clearly through design features that motorists must yield to all other users. The design should create conditions where pedestrians and bicyclists can walk or ride on the street and cross at any location, rather than at designated locations.

SHARED
STREETS



TYPICAL APPLICATION

Urban streets where it is desirable to prioritize walkability and slow traffic speeds to enhance livability and economic development goals.

GUIDANCE

- Shared streets should not have vertical curbs allowing pedestrians to use the entire right-of-way. A lack of curbs encourages cautious behavior on the part of all users, which in turn reinforces slower speeds and comfortable walking and bicycling conditions.
- Motor vehicle speeds should not exceed 15 mph at any time.
- Shared street gateway treatments should inform drivers they are entering a shared space. Common ways to do so include:
 - Narrowing entrances to one lane.
 - Elevating the street to the pedestrian level.
 - Using a colored or textured pavement.
- Traffic volumes should not exceed 100 vehicles in the peak hour.

CONSIDERATIONS

- The curbless nature of shared streets enhances universal access.
- Street zones may be delineated with pavement materials, color, bollards or street furniture.
- Sidewalk space in front of buildings should be paved with a surface that is smooth and vibration-free.
- Stormwater on shared streets can be captured using valley gutters, additional inlets and/or bioswales or other green infrastructure.
- A shared street may be closed to motor vehicles to host public events. Care should be taken to maintain access for bicyclists when it is closed to vehicles.
- If traffic volumes exceed thresholds, consider limiting access to only taxis, deliveries and para-transit.

REFERENCES

FHWA. *Achieving Multimodal Networks: Applying Design Flexibility and Reducing Conflicts*. 2016.
Boston. *Complete Streets Design Guidelines*. 2013.

NEIGHBORHOOD GREENWAY

Neighborhood greenways are streets with low motorized vehicle traffic volumes and speeds, designed and designated to give walking and bicycling priority. They use signs, pavement markings and speed and volume management measures to discourage through trips by motor vehicles and create safe, comfortable crossings of busy arterial streets.

NEIGHBORHOOD GREENWAYS



TYPICAL APPLICATION

- Neighborhood greenways use existing low-stress streets that parallel a major corridor.
- Roads with speeds less than or equal to 25 mph and volumes less than 3,000 ADT.
- If these conditions are not met, the treatments explained on pages 44 to 48 should be employed to reach these guidelines.

GUIDANCE

- Each of the subsequent pages provide additional guidance for implementation:
 - Traffic calming via raised pavement (page 45).
 - Traffic calming via street narrowing (page 46).
 - Traffic diversion (page 47).
 - Crossing treatments (page 48).

CONSIDERATIONS

- Given Montgomery County's non-grid street network, identification of connected, parallel routes may be difficult in some areas. It may be necessary to re-route short segments of neighborhood greenways along higher-stress routes, in which case separated bikeways, such as sidepaths or separated bike lanes, will be necessary.



REFERENCES

- IPBI, Alta Planning + Design, Portland State University. Bicycle Boulevard Planning and Design Guidebook. 2009.*
- NACTO. Urban Bikeway Design Guide. 2nd Edition.*
- Portland Bureau of Transportation. Neighborhood Greenway Assessment Report. 2015.*

PRIORITY SHARED LANES

Priority shared lane markings communicate bicyclist priority within a shared lane and guide bicyclists to ride outside of the door zone. Colored backing and more frequent spacing make priority shared lane markings more conspicuous than standard shared lane markings (also known as sharrows). This treatment does not improve most bicyclists' comfort in shared lanes with traffic.

PRIORITY
SHARED
LANE
MARKINGS

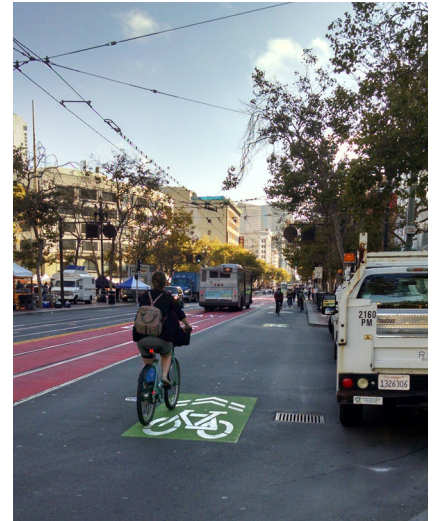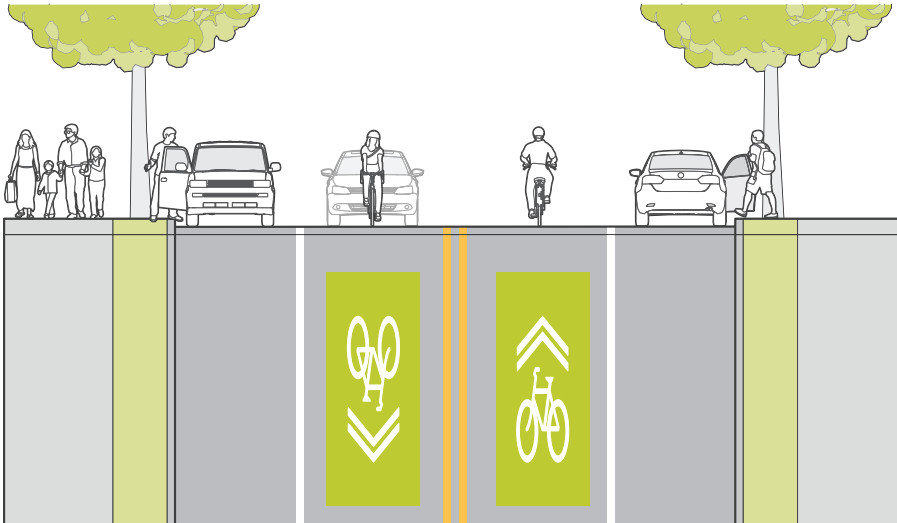

TYPICAL APPLICATION

On roadways where it is infeasible to install bike lanes, separated bike lanes or sidepath, but it is desirable to communicate bicyclists priority within a shared lane.

Common applications will be streets with high on-street parking turnover, typically those with ground-floor retail and dining, or on low-speed, low-volume frontage roads. They may also be used in separated bike lane mixing zones where a protected intersection is not provided.

CONSIDERATIONS

Requires FHWA permission to experiment.

- Green background color should underlay the entirety of the priority shared lane marking area.
- Priority Shared Lane markings can be supplemented with R4-11, BICYCLES MAY USE FULL LANE signage.
- Where volumes exceed approximately 1,500 vehicles per day, this facility may not be comfortable for all "Interested but Concerned" bicyclists.

GUIDANCE


- Ideally placed on streets with speeds 25 mph or less with average daily traffic less than 3,000 vehicles per day.
- May be used on streets with higher volumes and/or speeds (up to 6,000 average daily traffic at 30 mph, or 20,000 at 25 mph), but streets will not be comfortable for the "Interested but Concerned" rider.
- May be used as an interim measure on any roadway where it is desirable to communicate bicycle priority within a shared lane to close gaps in a bicycle network.
- May be used on two-lane or multi-lane streets.
- Should be placed in the center of travel lane to avoid wear in the wheel path and guide bicyclists' positioning.
- Should be spaced 100 feet apart or less.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2017.


Montgomery County Bicycle Planning Guidance. 2014

INTERSECTION TREATMENTS

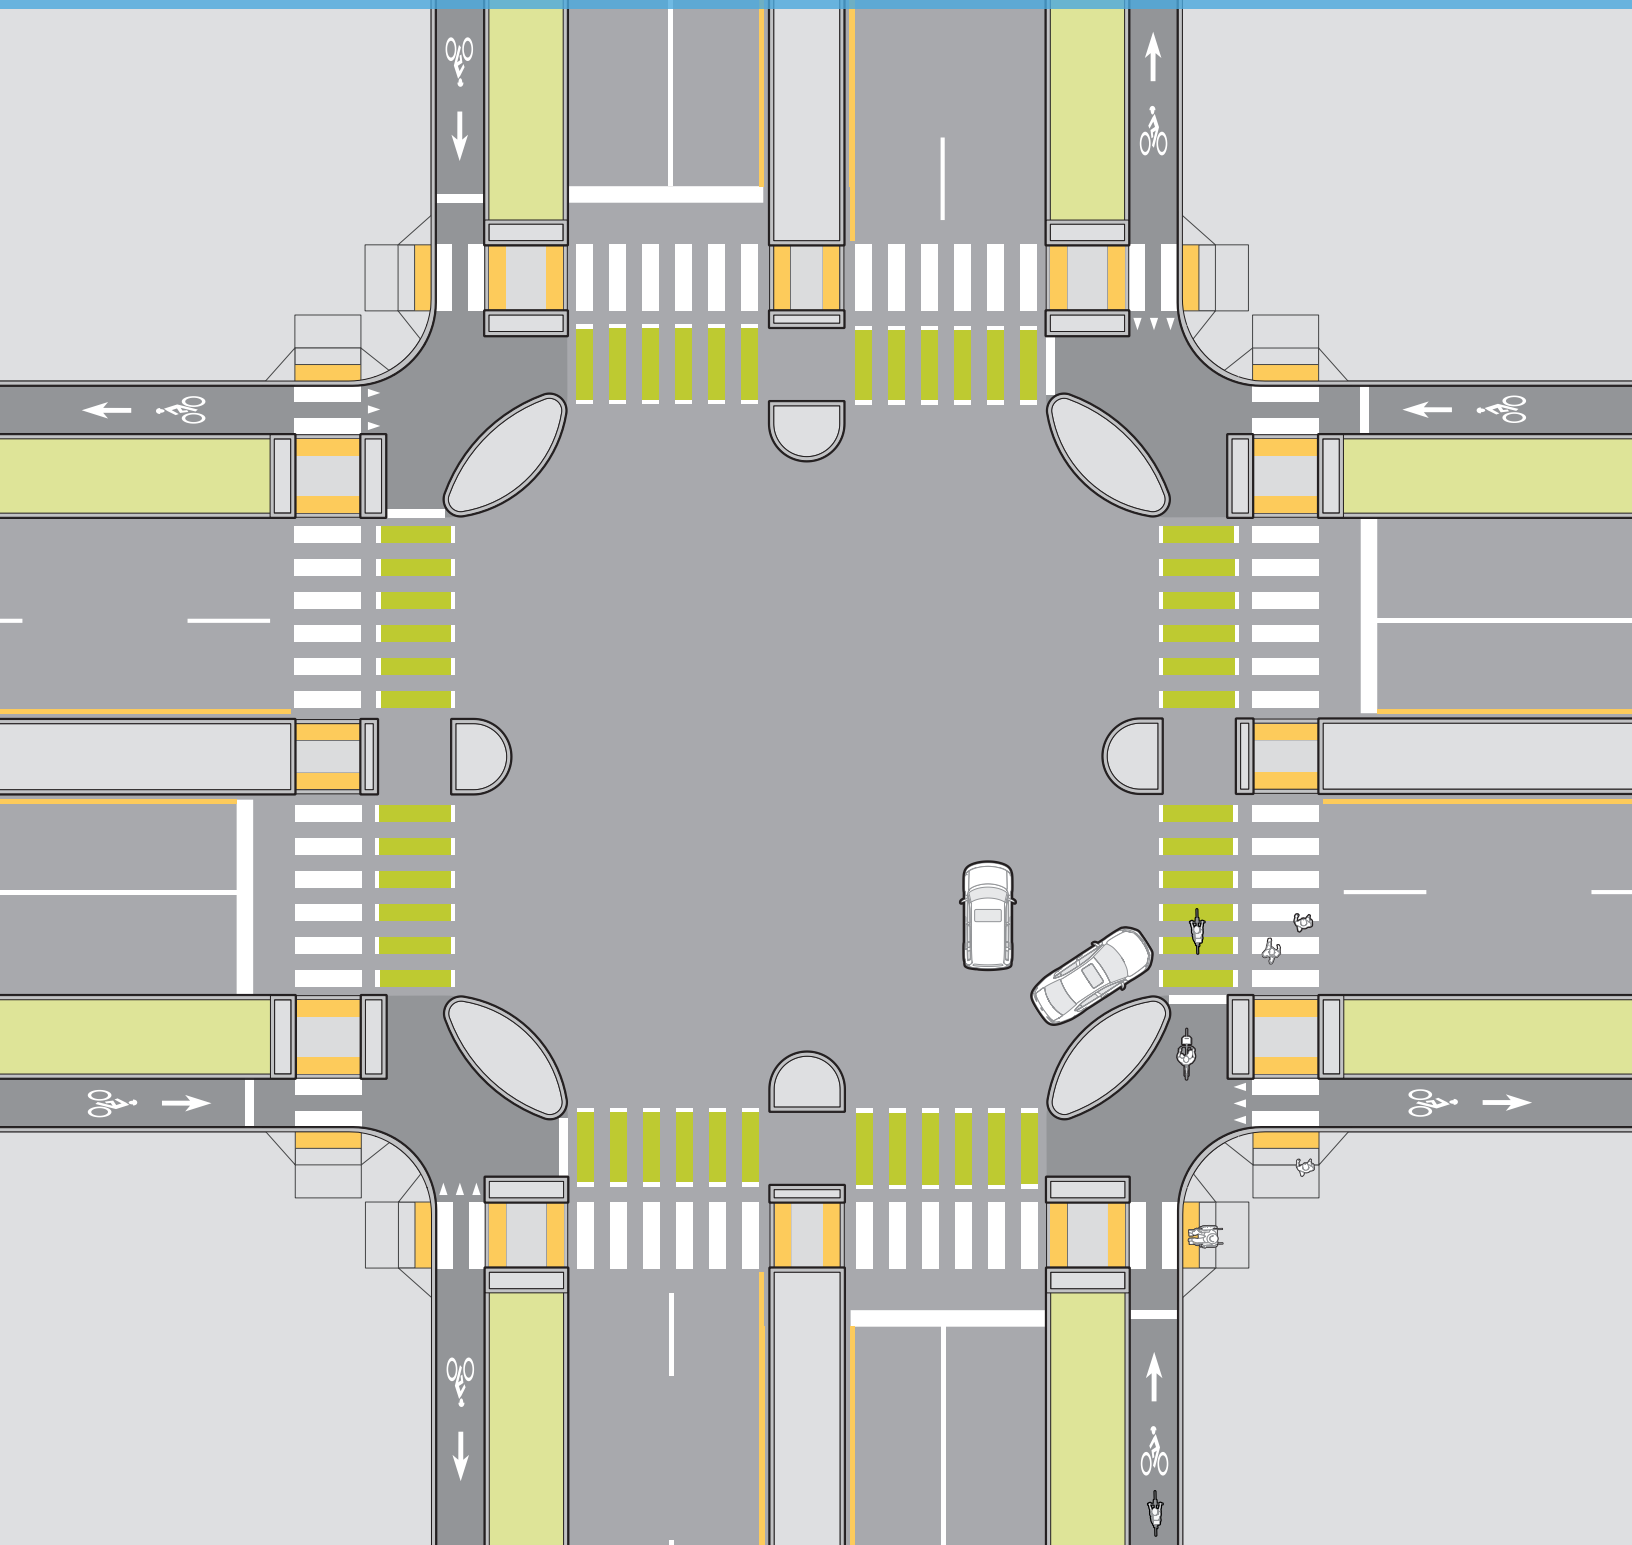

SEPARATED BIKE LANE - PROTECTED INTERSECTION

Protected intersections are a type of intersection design that improves safety by reducing the speed of turning traffic, improving sightlines and designating space for all road users. Protected intersections reduce conflict points between motorists and bicyclists.

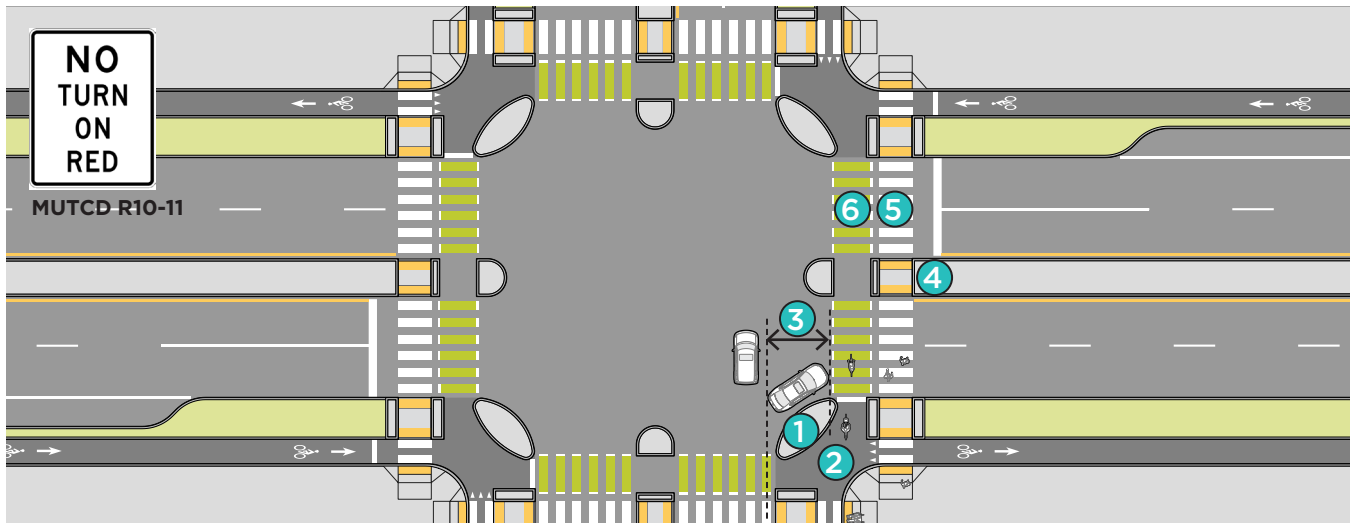

TYPICAL APPLICATION

All separated bike lane intersections.

GUIDANCE

- 1 Corner refuge island size may vary. The curb radius along the path of motor vehicle travel should minimize turning motorist speeds to 15 mph or less.
- 2 The forward bicycle queuing area should allow at least one bicyclist to wait without obstructing crossing bicyclists or pedestrians.
- 3 The motorist yield zone should be 6 feet in length minimum, up to a typical car length (16.5 feet), to create space for a turning motorist to yield to a through moving bicyclist.
- 4 A pedestrian crossing island should be a minimum of 6 feet in width to minimize pedestrian crossing distances of the street.
- 5 Marked pedestrian crosswalks should be provided across all bike lane crossings.
- 6 Bicycle crossings should be separate from pedestrian crossings. They can be supplemented with green pavement to improve contrast.

REFERENCES

NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.


CONSIDERATIONS

To convey which user has the right of way, intersections with separated bike lanes should be designed to minimize bicyclist exposure to motorized traffic and should minimize the speed differential at conflict points. This condition can be accomplished by:

- Creating space for a motorist to yield to bicyclists and pedestrians. Research has found crashes are reduced at locations where bicycle crossings are set back from the motorist travel way by a distance of 6 to 20 feet, creating space for turning motorists to yield. At locations where the street buffer is less than 6 feet midblock, additional dedication from developments may be necessary at intersections to create a greater than or equal to 6 foot setback.
- Minimizing the turning speed of motor vehicles through the use of small curb radii (less than 20 feet) along the corner refuge island. Where larger radii are required to accommodate oversized vehicles, such as buses and trucks, provide mountable aprons to maintain the smaller curb radii for most vehicles
- Providing a “No Turn On Red” sign where turning motorists are likely to block crosswalks or where protected signal phasing is provided.

TRANSITION FROM ONE-WAY SEPARATED BIKE LANE TO CONVENTIONAL BIKE LANE ON INTERSECTING STREET

This treatment provides an example of a typical design of a one-way separated bike lane transition to a conventional bike lane on an intersecting street.

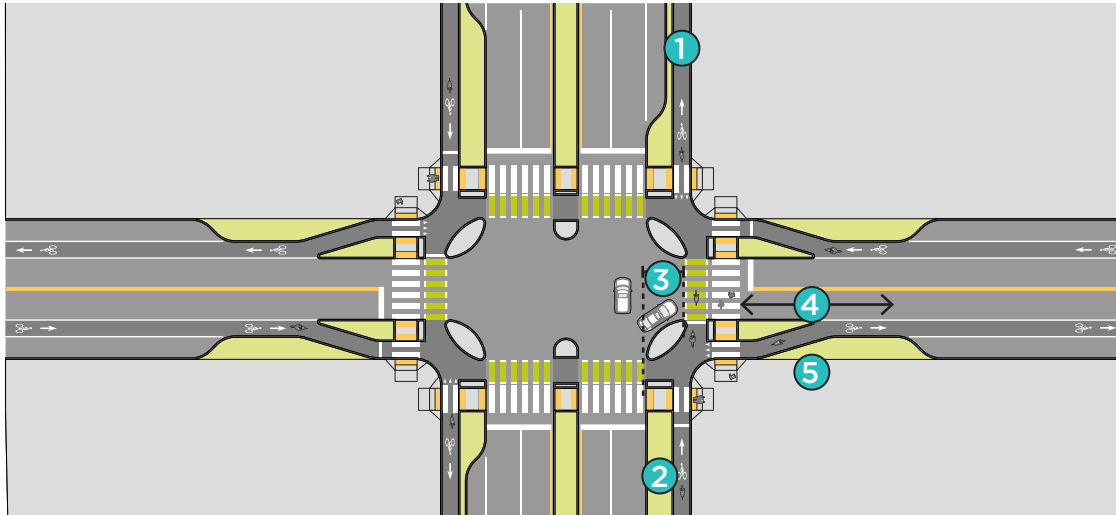

TYPICAL APPLICATION

- All one-way separated bike lane locations that require a transition to a cross street conventional bike lane.

GUIDANCE

- 1 For separated bike lane widths, see page 36.
- 2 A minimum street buffer of 6 feet is recommended.
- 3 Minimum offset is 6 feet, desirable is 16.5 feet.
- 4 Recommended minimum transition is 25 feet to ensure a bicyclist has time to react to an approaching vehicle.
- 5 Maximum 3:1 lateral taper.

CONSIDERATIONS

Intersections with separated bike lanes should be designed to minimize bicyclist exposure to motorized traffic and should minimize the speed differential at the points where travel movements intersect. The goal is to provide clear messages regarding right of way to all users moving through the intersection in conjunction with geometric features that result in higher compliance where users are expected to yield.

The transition design should:

- Maintain separation through the intersection.
- Maintain a vertical or a visual separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Clearly communicate how bicyclists are intended to enter and exit the separated bike lane using signage and markings to minimize conflicts with other users.

REFERENCES


NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.

TRANSITION FROM ONE-WAY SEPARATED BIKE LANE TO CONVENTIONAL BIKE LANE ON SAME STREET

This treatment provides an example of a typical design of a one-way separated bike lane transition to a conventional bike lane on the same street.

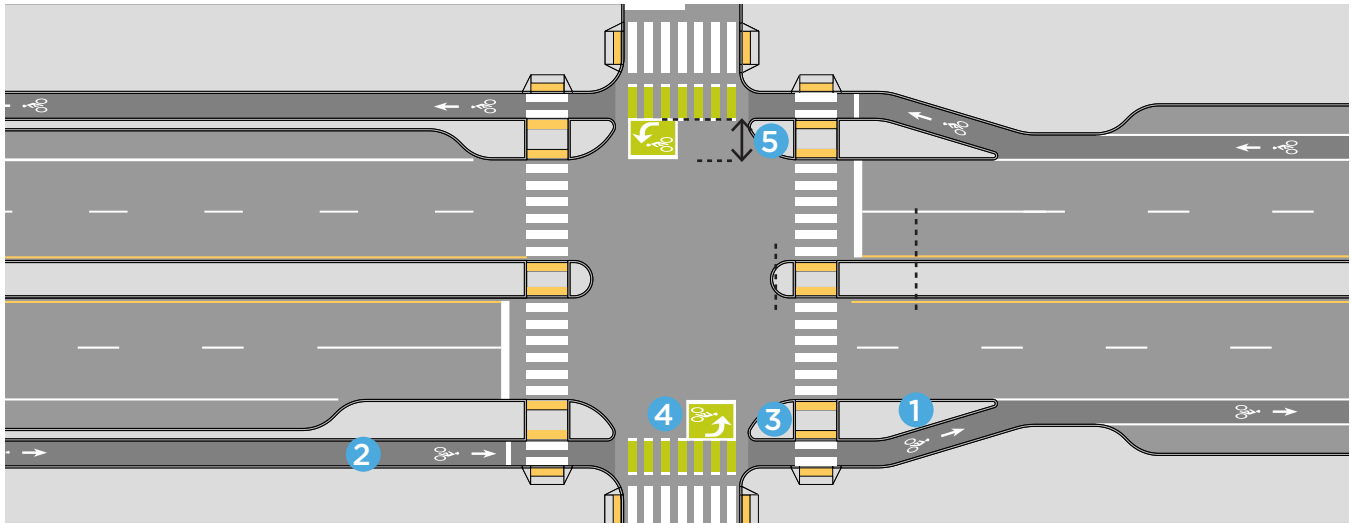

TYPICAL APPLICATION

- All one-way separated bike lane locations that require a transition to a conventional bike lane on the same street.

GUIDANCE

- 1 Maximum 3:1 lateral taper.
- 2 For separated bike lane widths, see page 36.
- 3 A protecting island should be provided to shadow the bike lane on the far side of the intersection and to create protection for queueing left turn bicyclists waiting in the turn box.
- 4 Provide a two-stage turn queue box at intersections with cross streets that have bike lanes or shared lanes.
- 5 Bicycle crossing is offset a minimum of 6 feet from the outside edge of travel lane, desirable is 16.5 feet.

CONSIDERATIONS

To convey which user has the right-of-way, intersections with separated bike lanes should be designed to minimize bicyclist exposure to motorized traffic and should minimize the speed differential at conflict points. The goal is to provide clear messages regarding right of way to all users moving through the intersection in conjunction with geometric features that result in higher compliance where users are expected to yield.

The transition should:


- Maintain separation through the intersection.
- Occur on the far side of intersections to reduce conflicts with turning vehicles within the intersection. Maintaining the offset through the crossing improves the sightlines between right-turning drivers and through bicyclists.
- Maintain a vertical or visual separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Clearly communicate how bicyclists should enter and exit the separated bike lane, minimizing conflicts with other users.

REFERENCES

- NACTO. Urban Bikeway Design Guide. 2nd Edition.*
- MassDOT. Separated Bike Lane Planning and Design Guide. 2015.*
- FHWA. Separated Bike Lane Planning and Design Guide. 2015.*

TRANSITION FROM ONE-WAY SEPARATED BIKE LANE TO INTERSECTING STREET WITH TWO-STAGE TURN QUEUE BOX

This treatment provides an example of a typical design of a one-way separated bike lane transition to a conventional bike lane or a shared lane on a cross street using a two-stage turn queue box.

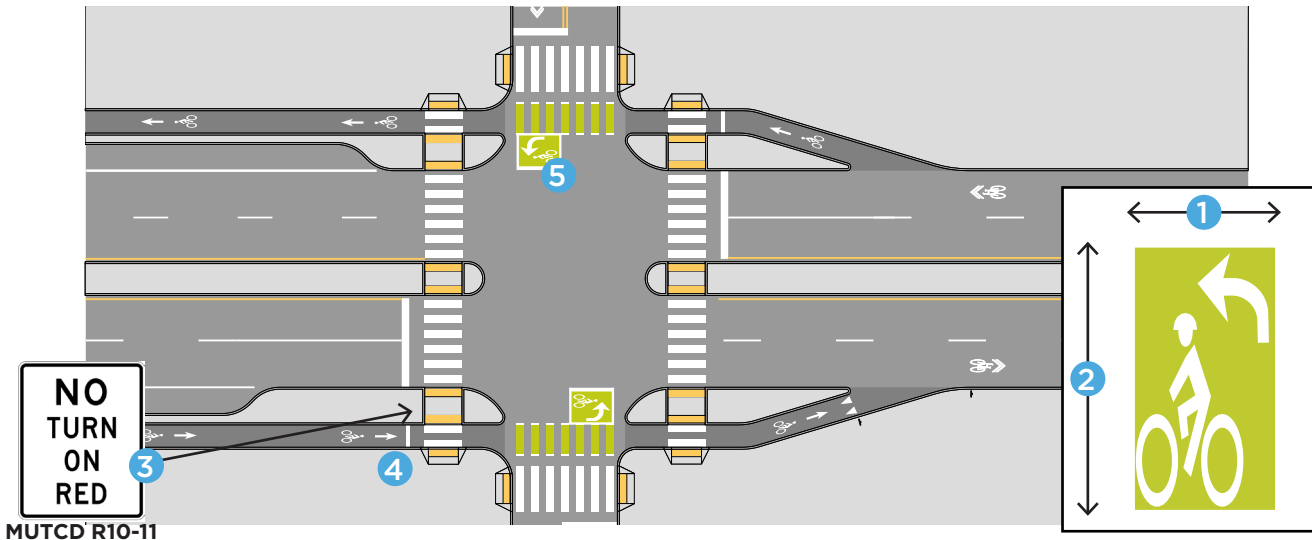

TYPICAL APPLICATION

All separated bike lane locations that require a transition to a cross street conventional bike lane or shared lane.

GUIDANCE

- 1 A minimum width of 6.5 feet is recommended.
- 2 A minimum length of 6.5 feet is recommended.
- 3 “No Turn On Red” (R10-11) sign restrictions should be used to prevent vehicles from entering the queuing area at signalized intersections.
- 4 The use of a supplemental sign instructing bicyclists how to use the bike box is optional.
- 5 The bike box should consist of a green box outlined with solid white lines and supplemented with a bicycle symbol and a turn arrow to emphasize the crossing direction.

CONSIDERATIONS

Two-stage turn queue boxes have interim approval from FHWA.


- Two-stage turn queue box dimensions will vary based on the street operating conditions, the presence or absence of a parking lane, traffic volumes and speeds, and available street space. The turn box may be placed in a variety of locations, including in front of the pedestrian crossing (the crosswalk location may need to be adjusted), in a jug-handle configuration within a sidewalk, or at the tail end of a parking lane or a median island.
- Dashed bike lane extension markings may be used to indicate the path of travel across the intersection into the turn queue box.

REFERENCES

- NACTO. *Urban Bikeway Design Guide*. 2nd Edition.
- MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.
- FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.
- FHWA. *Bicycle Facilities and the Manual on Uniform Traffic Control Devices - Two-Stage Turn Box*. 2015.

TRANSITION FROM TWO-WAY SEPARATED BIKE LANES TO ONE-WAY SEPARATED BIKE LANE ON SAME STREET

This treatment provides a transition from two-way separated bike lanes to one-way separated bike lanes on the same street.

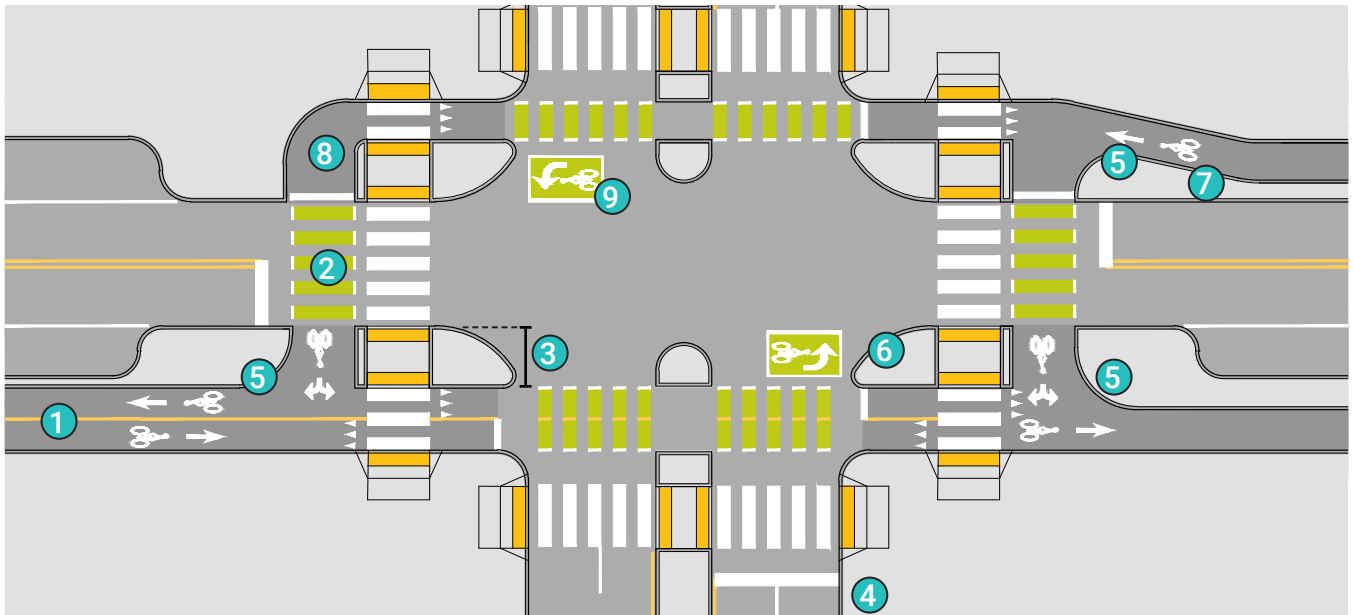

TYPICAL APPLICATION

All transitions between two-way and one-way separated bike lanes on the same street.

GUIDANCE

- 1 For separated bike lane widths, see page 36.
- 2 For crossings, see page 32.
- 3 Bicycle crossing is offset from the outside travel lane edge by 6 feet (min) and 20 feet (preferred).
- 4 Use “No Turn on Red” sign restrictions where bicycle turn queue box or bike box is present.
- 5 Provide minimum 10-foot curb radius to allow turning bicyclists to enter bike lane.
- 6 Construct outside curb radii to minimize turning motorist speeds to 15 mph or less.
- 7 Separated bike lane should taper to create more space between turning vehicles and bicycle crossing.
- 8 Provide bicycle queuing space to enable transition to two-way bikeway.


- 9 Optional two-stage turn-queue box, see page 26.

CONSIDERATIONS

- This treatment may be used at intersections with all types of traffic control.
- At signalized intersections, there should be opportunities on both sides of the intersection to transition from one-way to two-way separated bike lanes to reduce bicyclist delay:
 - Bicyclists in the one-way separated bike lanes approaching the intersection at a red signal can use the near-side crossing to make the transition.
 - Bicyclists in one-way separated bike lanes approaching the intersection at a green signal can proceed through the intersection using the far-side crossing to make the transition.
- Where the design vehicle is a truck or other heavy vehicle, a mountable curb on the outside curb of the deflector island is preferred when the alternative is a larger turning radii.

TRANSITION FROM TWO-WAY SEPARATED BIKE LANE TO ONE-WAY SEPARATED BIKE LANE ON INTERSECTING STREET

This treatment provides an example of a typical design of a two-way separated bike lane transition to a one-way separated bike lane on an intersecting street.

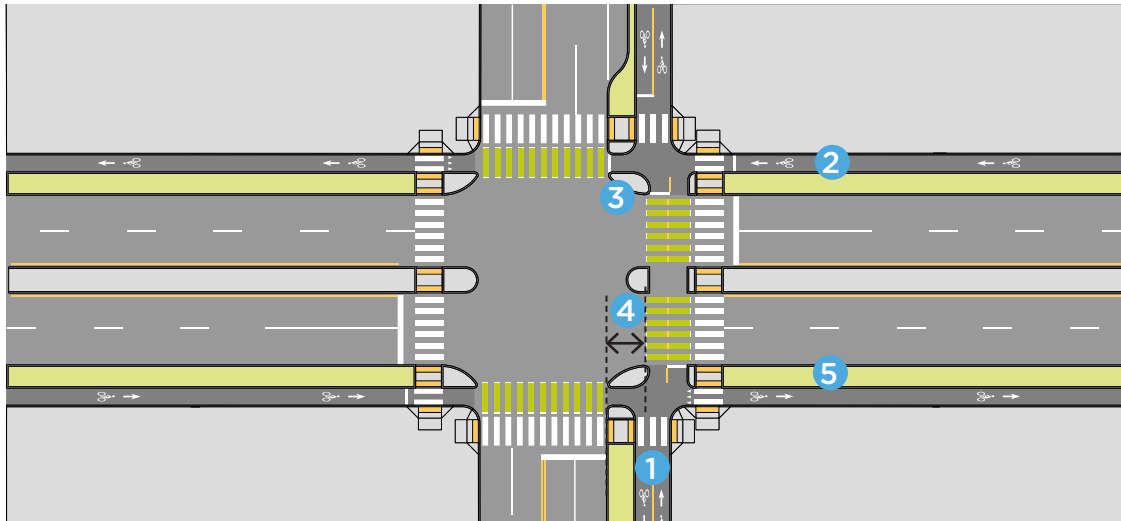

TYPICAL APPLICATION

- All two-way separated bike lane locations that require a transition to a cross street one-way separated bike lane.

GUIDANCE

- 1 A minimum two-way separated bike lane width of 10 feet is recommended.
- 2 For separated bike lane widths, see page 36.
- 3 A 15-foot corner radius is recommended for turns from the two-way bike lane onto the one-way bike lane.
- 4 Bicycle crossing is off set by a minimum of 6 feet from the outside edge of travel lane, a desirable offset is 16.5 feet.
- 5 A minimum street buffer of 6 feet is recommended.

CONSIDERATIONS


Intersections with separated bike lanes should be designed to minimize bicyclist exposure to motorized traffic and the speed differential at the points where travel movements intersect. The goal is to provide clear messages regarding right of way to all users moving through the intersection. The separated bike lane is designed with geometric features that result in higher compliance where users are expected to yield.

The transitional design should:

- Maintain separation through the intersection.
- Maintain a vertical or visual separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Clearly communicate how bicyclists are intended to enter and exit the separated bike lane, minimizing conflicts with other users.

TRANSITION FROM TWO-WAY SEPARATED BIKE LANE TO CONVENTIONAL BIKE LANE ON INTERSECTING STREET

This treatment provides an example of a typical design of a two-way separated bike lane transition to conventional bike lanes on an intersecting street.

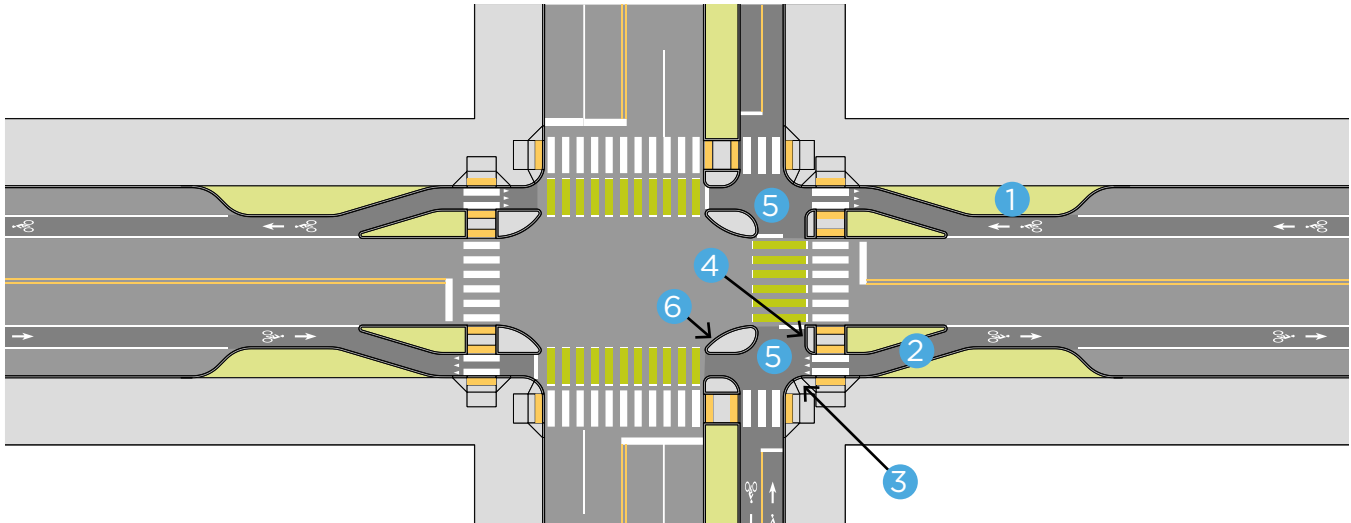

TYPICAL APPLICATION

All two-way separated bike lane locations that require a transition to conventional bike lanes on a cross street.

GUIDANCE

- 1 Conventional bike lanes should transition to separated bike lanes as they approach the intersection.
- 2 For separated bike lane widths, see page 36.
- 3 A 15-foot corner radius is recommended for turns between the two-way bike lane and the one-way bike lane.
- 4 Provide a minimum 10 foot curb radius to allow left turning bicyclists to enter the one-way bike lane.
- 5 Ensure the forward bicycle queuing area is sufficiently sized to accommodate predicted bicycle volumes, especially for those bicyclists turning from the conventional bike lanes.
- 6 Construct outside curb radii based on MCDOT and/or SHA standards.

- For guidance on protected intersection dimensions, see page 23.

CONSIDERATIONS

The transition design should:

- Maintain separation through the intersection.
- Guide right turning bicyclists to turn slowly at all times, yielding to pedestrians in crosswalks.
- Maintain a vertical or visual separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Clearly communicate how bicyclists are intended to enter and exit the separated bike lane, minimizing conflicts with other users.
- Where outside turn radii are greater than 15 feet for right turning motorist across the separated bike lane, consideration should be given to installing a truck apron to accommodate the larger turn radius.

If conventional bike lanes are on roadways without on-street parking, it may be necessary to provide additional right-of-way or convert sidewalk space to bicycling space to accommodate transitions to a protected intersection.

REFERENCES


NACTO. *Urban Bikeway Design Guide. 2nd Edition.*

MassDOT. *Separated Bike Lane Planning and Design Guide. 2015.*

FHWA. *Separated Bike Lane Planning and Design Guide. 2015.*

BIKE BOXES

A bike box is a designated area at the head of a traffic lane at a signalized intersection that provides bicyclists with a safe and visible way to get ahead of queuing traffic during the red signal phase.

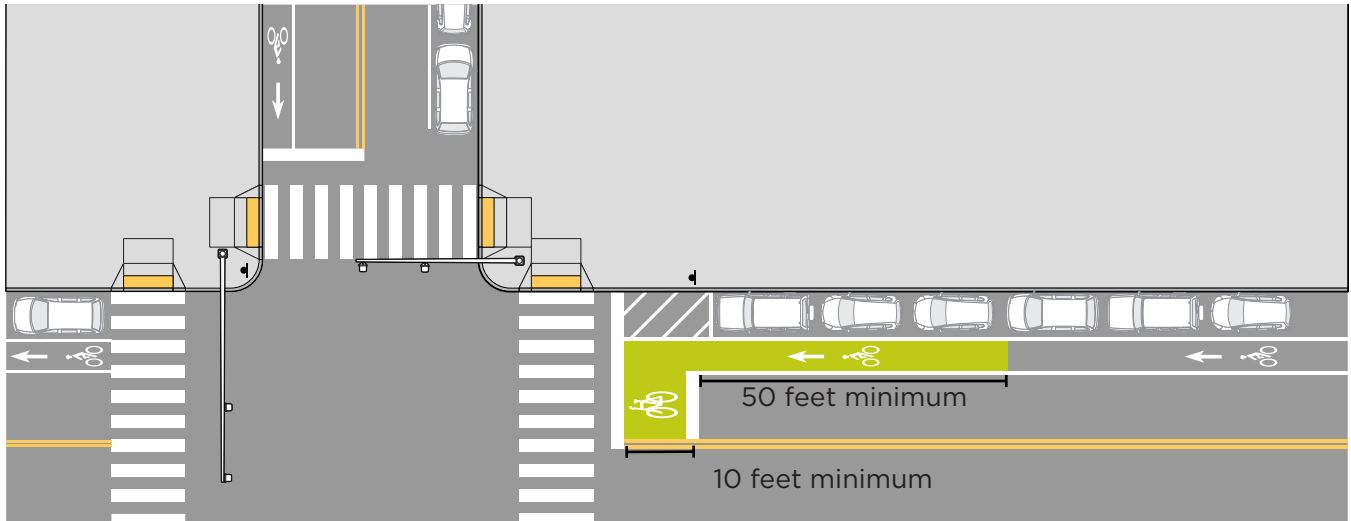

TYPICAL APPLICATION

- Where through bicyclists and right-turning motorists conflict.
- Where a bicycle lane does not continue across an intersection.

GUIDANCE

- Bike boxes are primarily installed at signalized intersections.
- Bike boxes should be a minimum of 10 feet deep from the stop bar.
- A bike box should only extend across one travel lane. Bike boxes should not be used to facilitate bicycle left turns. A two-stage turn queue box is the preferred method of accommodating left turns.
- Green pavement can be used within the bicycle box to deter motor vehicles from encroaching.
- At least 50 feet of bicycle lane should connect the the approach leg of the intersection to the bike box so bicyclists do not have to weave between queuing motor vehicles to access it.

CONSIDERATIONS

- Bicyclists waiting in front of stopped motorists gain a head start by being 10-15 feet in front of stopped vehicles. This head start can be extended with a leading bicycle and/or pedestrian phase.
- Motorists should be discouraged from merging into the bicycle lane with a solid bicycle lane line to ensure bicyclists can enter the bike box.
- At locations where there are high volumes of turning traffic or frequent conflicts between turning motorists and bicyclists during stale green portions of the signal phase, it may be advisable to consider a right turn lane or separate phasing to mitigate conflicts in lieu of or in addition to a bike box.

REFERENCES


Boston. *Complete Streets Design Guidelines*. 2013.

NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

FHWA. *Bicycle Facilities and the Manual on Uniform Traffic Control Devices - Bicycle Box*. 2015.

RAISED DRIVEWAYS

This treatment raises the bikeway to a driveway level to help mitigate the conflicts between bicyclists on shared use paths or separated bike lanes and motor vehicles entering or exiting driveways that cross the bikeway.

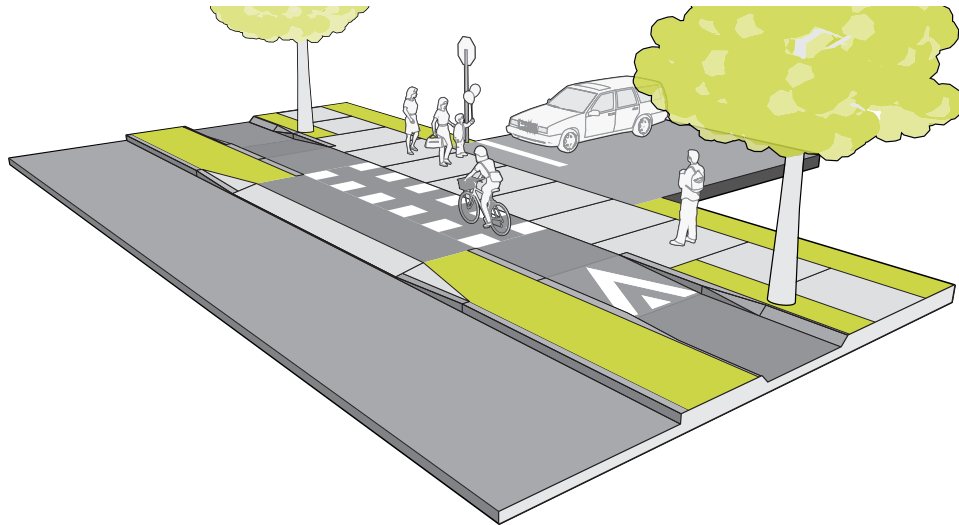

TYPICAL APPLICATION

Where driveways cross separated bike lanes, sidepaths or shared use paths.

GUIDANCE

- All separated bike lane and sidepath driveway crossings should be raised. If the separated bike lane is street-level at driveways, it should be raised to sidewalk-level. In these situations, the transition ramp for bicyclists from street- to sidewalk-level should have a maximum 10 percent slope.
- Driveway approach ramps from street-level should be built at 5 to 15 percent slope.
- Sight triangles must be maintained, based on traffic speeds and volumes per the MCDOT or SHA standards as applicable.
- Driveway curb radii should encourage motorists to slow down and yield as they exit the roadway.
- Separated bike lane/sidepath surface material, paint color and texture should continue across the driveway to emphasize bikeway priority and encourage motor vehicle yielding. Dual rows of painted squares can be used across driveways (as shown). Green bars are also acceptable.

CONSIDERATIONS

- If the bicyclist transition ramp is longer than 6 feet with a slope greater than 5 percent, speed hump markings are recommended.
- If there are many driveways in quick succession, designers should consider an intermediate or sidewalk-level bikeway because frequent transitional ramps are not comfortable for bicyclists.
- Recommended driveway widths within public rights-of-way are specified in the Montgomery County Standard Detail for Residential and Commercial Driveways.
- At uncontrolled commercial and high-volume residential driveways, bicycle warning or bicycle/pedestrian warning signage (W11-15) should be installed facing those exiting the driveway. If the separated bike lane is two-way, a two-directional plaque should be added (W1-7 alt.).
- Controlled commercial and high-volume residential driveway function more similarly to streets. They should be designed with protected intersection geometries. See page 23 for more information.


REFERENCES

- NACTO. Urban Bikeway Design Guide. 2nd Edition.*
- MassDOT. Separated Bike Lane Planning and Design Guide. 2015.*
- FHWA. Separated Bike Lane Planning and Design Guide. 2015.*


SEPARATED BIKE LANE: BIKE CROSSINGS

A bicycle crosswalk is a marked crossing of an intersection with a street, driveway or alley that delineates a preferred path for people bicycling through the intersection.

One-way SBL
Crosswalk

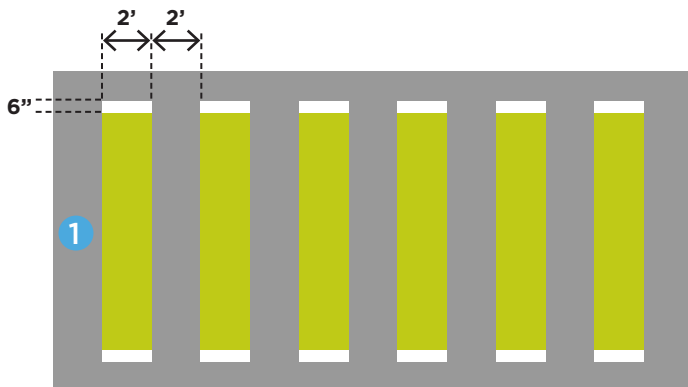

Two-way SBL
Crosswalk

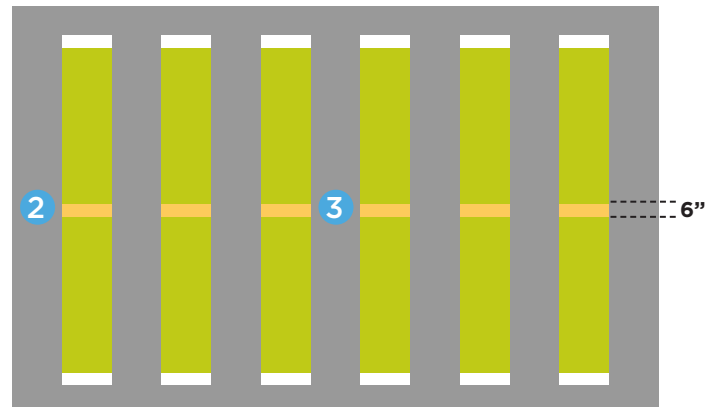

TYPICAL APPLICATION

All separated bike lane crossings of streets, alleys and driveways serving greater than 10 vehicles per day.

CONSIDERATIONS

The bicycle crossing may be supplemented with a green-colored surface to improve contrast with the surrounding roadway and adjacent pedestrian crossing, if present. Green surfacing may be desirable at crossings where concurrent vehicle turning movements are allowed.

GUIDANCE

- 1 For separated bike lane widths, see page 36.
- 2 A minimum width of 10 feet is recommended for two-way separated bike lanes.
- 3 A centerline is recommended for two-way separated bike lanes. It should be marked with a 3-foot solid yellow line, with a 9-foot gap.

REFERENCES

NACTO. *Urban Bikeway Design Guide. 2nd Edition.*

MassDOT. *Separated Bike Lane Planning and Design Guide. 2015.*

FHWA. *Separated Bike Lane Planning and Design Guide. 2015.*

- **THIS PAGE IS INTENTIONALLY LEFT BLANK**




DETAILS ON SEPARATED BIKE LANES

SEPARATED BIKE LANE ZONES

The cross-section of a separated bike lane is composed of three separate zones:

- **Bike lane:** the bicyclist operating space between the street buffer and the sidewalk buffer.
- **Street buffer:** the street buffer separates the bike lane from motor vehicle traffic.
- **Sidewalk buffer:** the sidewalk buffer separates the bike lane from the sidewalk.

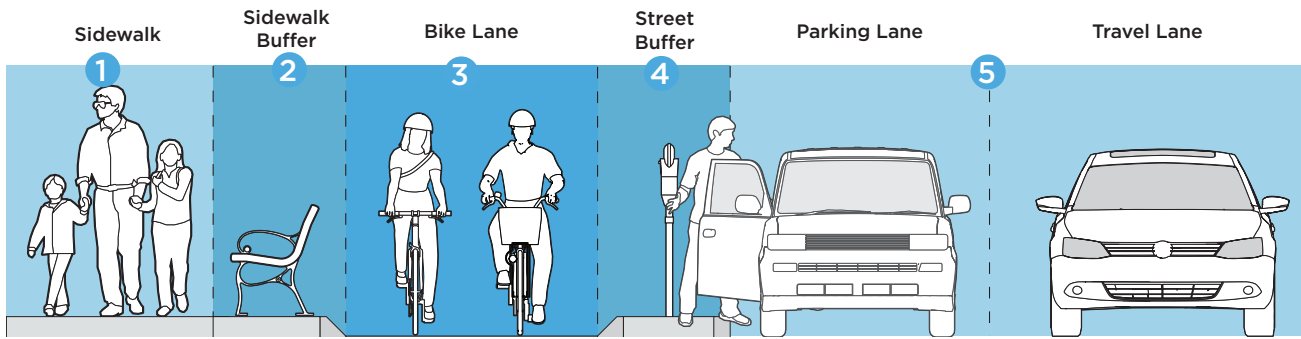

TYPICAL APPLICATION

All separated bike lanes.

GUIDANCE

- 1 The sidewalk width should be determined by the anticipated peak hour pedestrian volume.
- 2 The sidewalk buffer is desirable.
- 3 The bike lane is required and may be at street level, intermediate level or sidewalk level. (See pages 38-43)
 - Bike lane width should be determined by the anticipated peak hour bicycle volume. (See page 36)
 - A minimum shy distance of 1 foot should be provided between any vertical objects in the sidewalk or street buffer and the bike lane.
- 4 The street buffer is required and should be separated from the street by a median and/or other vertical objects. For minimum dimensions, see page 37.


- 5 Consider narrowing travel and parking lanes to the minimum widths in constrained corridors.

CONSIDERATIONS

- The street buffer provides safety and comfort for people bicycling and driving by physically separating them from motor vehicles with a series of vertical objects or a raised median.
- The street buffer eliminates the risk of a bicyclist being hit by an opening car door.
- The width of the street buffer influences intersection operations and bicyclist safety.
- A sidewalk buffer minimizes encroachment between the bike lane and sidewalk zones.
- In addition to helping provide space for separated bike lanes, narrowing travel lanes can reduce the operating speed of the roadway.

SEPARATED BIKE LANE WIDTHS


Separated bike lane widths should be chosen based on the anticipated number of bicyclists in the typical peak hour.

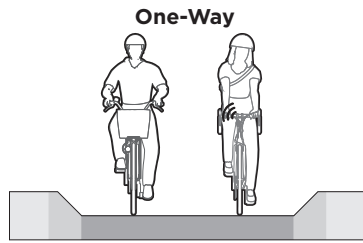

One-Way

at least 6.5 ft. recommended to enable passing movements

Same Direction Bicyclists/Peak Hour	Bike Lane Width (ft.)	
	Rec.	Min.
<150	6.5	5.0
150-750	8.0	6.5
>750	10.0	8.0

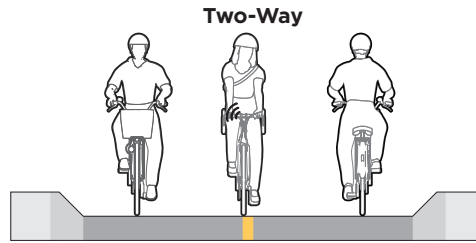


Two-Way


at least 10 ft. recommended to enable passing movements

Bidirectional Bicyclists/Peak Hour	Bike Lane Width (ft.)	
	Rec.	Min.
<150	10.0	8.0
150-400	11.0	10.0
>400	14.0	11.0

SBL Curb Options



Beveled
slope = 1V:1H



Mountable
slope = 1V:4H maximum

TYPICAL APPLICATION

- All separated bike lanes.

GUIDANCE

- Bike lane width should be determined by the anticipated peak hour bicycle volume shown in the tables above.
- The bike lane zone should be sufficiently wide to enable passing maneuvers between bicyclists.
- Beveled or mountable curbs are recommended adjacent to shops and other destinations to ease access to the adjacent sidewalks.
- Standard 6-inch vertical curbs are recommended adjacent to motor vehicle travel lanes and on-street parking to discourage encroachment into the separated bike lane.
- In major activity centers, it is likely that peak hour volumes will exceed 150 bicyclists per hour over time and necessitate wider lanes.

CONSIDERATIONS


- The effective width of the bike lane zone is impacted by the elevation of the bike lane and the design of curbs adjacent to the bike lane.
 - Beveled and mountable curbs provide a forgiving edge, reducing the likelihood of a bicycle crash due to striking a vertical curb.
 - Sidewalk-level bike lanes may allow bicyclists to use part of the street or sidewalk buffer in constrained locations.
- Separated bike lanes generally attract a wider spectrum of bicyclists, some of whom, such as children and seniors, ride at slower speeds.
- Separated bike lanes have been documented to significantly increase bicycling.
- Proximity to objects or vertical curbs along the bike lane edge can reduce the effective width of the bike lane and user comfort.

REFERENCES

- NACTO. *Urban Bikeway Design Guide. 2nd Edition.*
- MassDOT. *Separated Bike Lane Planning and Design Guide. 2015.*
- FHWA. *Separated Bike Lane Planning and Design Guide. 2015.*
- People for Bikes. *The First Major Academic Study of Protected Bike Lanes in the U.S. is Out. 2014.*

DETERMINING ZONE WIDTHS IN CONSTRAINED CORRIDORS

When designing separated bike lanes in constrained corridors, designers may need to minimize some portions of the cross-section to achieve a context-sensitive design that safely and comfortably accommodates all users.

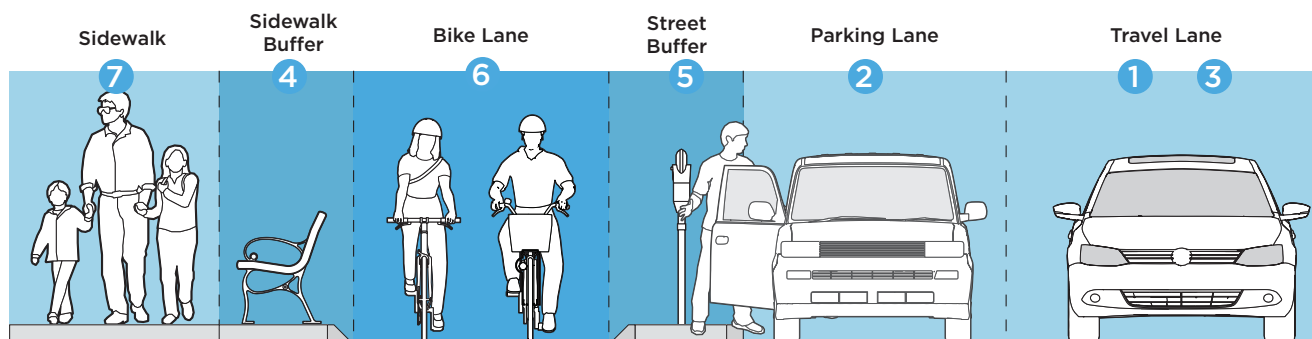

GUIDANCE

When making space trade-offs, designers should prioritize maintenance of desired and minimum zone widths in the following order. This general guidance may be flexible, based on adjacent land uses.

- 1 Narrowing the **travel lane** to minimum widths (10 or 11 feet). In addition to providing space for separated bike lanes, narrowing the travel lane can reduce the operating speed of the road.
- 2 Eliminating **on-street parking**.
- 3 Eliminating **travel lanes**.
- 4 Narrowing or eliminating the sidewalk buffer.
- 5 Narrowing the **street buffer** to a minimum of 2 feet at midblock locations and a minimum of 6 feet at intersections. These minimums apply in constrained situations, with 3 feet being recommended for mid-block locations in less constrained corridors. See page 23 for intersection dimensions.
- 6 Narrowing the **separated bike lane** to a minimum width. See page 37 for bike lane widths.
- 7 Narrowing the **sidewalk** to a minimum width needed to accommodate pedestrian demand, but no less than 5 feet.

REFERENCES

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.


FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.

CONSIDERATIONS

- The allocation of space can vary from midblock locations to intersection approaches.
- The street buffer is critical to the safety of separated bike lanes. Narrowing it should be avoided wherever possible, especially at intersections. Providing a larger street buffer at intersections can be achieved by tapering the bike lane toward the sidewalk as it approaches the intersection and narrowing or eliminating the sidewalk buffer.
- In constrained locations where physical separation is desirable because of higher pedestrian demand, raised separation in the sidewalk buffer is preferable to ensure pedestrians do not walk in the bike lane and bicyclists do not ride on the sidewalk.
- Where it is not feasible to provide raised separation, it will be necessary to distinguish the bike lane from the sidewalk through the use of stained surfaces or applied colored surface materials that provide a high degree of visual contrast between the two.

SEPARATED BIKE LANES: ONE-WAY AT SIDEWALK LEVEL

This treatment provides an exclusive, unidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements at the same elevation as the sidewalk.

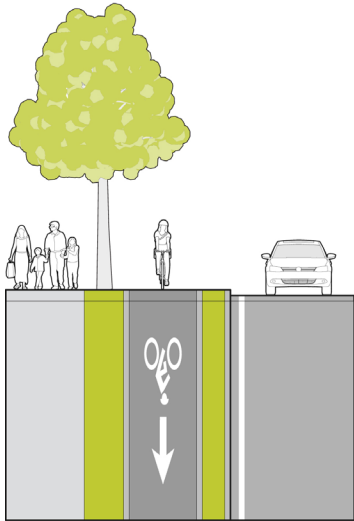

TYPICAL APPLICATION

- Both sides of two-way streets.
- Right side of one-way streets.

GUIDANCE

- For separated bike lane widths, see page 36.
- To determine priorities in constrained corridors, see page 37.
- A constrained bike lane width of 4 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane should occur for the length of the transit stop or accessible parking space(s).
- A significant visual contrast between the sidewalk and bike lane is required when the sidewalk buffer is eliminated.

CONSIDERATIONS

Sidewalk level bike lanes:

- May encourage pedestrian and bicyclist encroachment unless a continuous sidewalk buffer is provided.
- Allow separation from motor vehicles in locations with limited rights-of-way.
- Requires no transition for raised bicycle crossings at driveways, alleys or streets.
- Allow use of bike lane as a level landing area for bus stops in constrained corridors with narrow street buffers.
- May reduce maintenance needs by preventing debris build-up from roadway run-off.
- May simplify plowing operations.
- Allow bicyclists to use a portion of the sidewalk or street buffer to pass other bicyclists in constrained corridors where sidewalk buffers are eliminated.
- Provide intuitive and simplified transitions to existing bike lanes and shared travel lanes (see pages 24-26).

REFERENCES

NACTO. *Urban Bikeway Design Guide. 2nd Edition.*

MassDOT. *Separated Bike Lane Planning and Design Guide. 2015.*

FHWA. *Separated Bike Lane Planning and Design Guide. 2015.*

SEPARATED BIKE LANES: ONE-WAY AT INTERMEDIATE LEVEL

This treatment provides an exclusive, unidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements at an elevation below the sidewalk, but above the street.



TYPICAL APPLICATION

- Both sides of two-way streets.
- Right side of one-way streets.

GUIDANCE

- A minimum curb reveal of 2 inches below sidewalk level is required to provide a detectable edge for visually impaired pedestrians.
- The recommended minimum width is 6.5 feet, which allows for passing.
- A constrained bike lane with of 4 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane may only occur for the length of the transit stop or accessible parking space(s).
- For additional information on separated bike lane width, see page 36.
- To determine priorities in constrained corridors, see page 37.

CONSIDERATIONS

Intermediate level bike lanes:


- Create a separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Ensure a detectable edge is provided for people with vision disabilities.
- Make it easier to create raised bicycle crossings at driveways, alleys or streets.
- May reduce maintenance needs by preventing debris build-up from roadway run-off.
- May complicate snow plowing operations.
- May require careful consideration of drainage design and, in some cases, may require catch basins to manage bike lane run-off.
- Provide intuitive and simplified transitions to existing bike lanes and shared travel lanes (see pages 24-26).

REFERENCES

- NACTO. Urban Bikeway Design Guide. 2nd Edition.*
- MassDOT. Separated Bike Lane Planning and Design Guide. 2015.*
- FHWA. Separated Bike Lane Planning and Design Guide. 2015.*

SEPARATED BIKE LANES: ONE-WAY AT STREET LEVEL

This treatment provides an exclusive, unidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements located at the same elevation as the street.

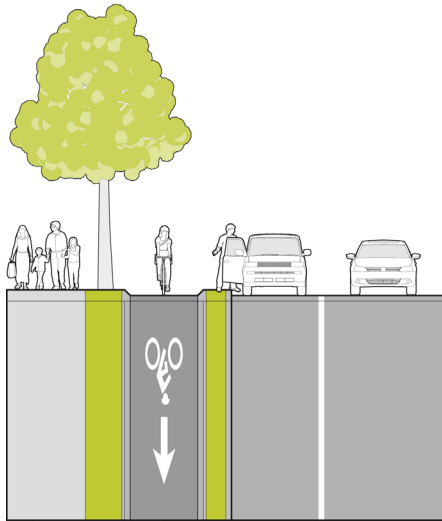

TYPICAL APPLICATION

- Both sides of two-way streets.
- Right side of one-way streets.

GUIDANCE

- The recommended minimum width is 6.5 feet, which allows for passing.
- A constrained bike lane width of 4 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane may only occur for the length of the transit stop or accessible parking space(s).
- For additional information on separated bike lane width, see page 36.
- To determine priorities in constrained corridors, see page 37.

CONSIDERATIONS


Street-level bike lanes:

- Create a separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Ensure a detectable edge is provided for people with vision disabilities.
- May increase maintenance needs to remove debris from roadway run-off unless street buffer is raised.
- May complicate snow plowing operations.
- May require careful consideration of drainage design and in some cases may require catch basins to manage bike lane run-off.
- Provide intuitive and simplified transitions to existing bike lanes and shared travel lanes (see pages 24-26).

If flexposts are used as the vertical separation element, they must be located and spaced in a manner that prevents motor vehicle encroachment. Closer spacing at intersections, high-turnover parking and/or drop-off areas may be appropriate.

SEPARATED BIKE LANES: TWO-WAY AT SIDEWALK LEVEL

This treatment provides an exclusive, bidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements at the same elevation as the sidewalk.

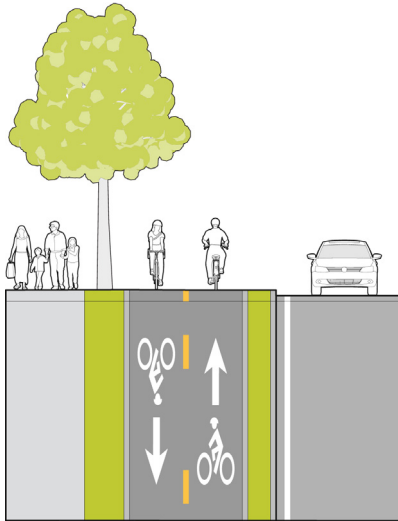

TYPICAL APPLICATION

- Roadway is greater than 4 lanes in width.
- Both sides of two-way street where destinations exist on both sides and where crossing spacing is infrequent.
- Right side of one-way streets.

GUIDANCE

- A constrained bike lane width of 8 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane may only occur for the length of the transit stop or accessible parking space(s).
- A significant visual contrast between the sidewalk and bike lane is required when the sidewalk buffer is eliminated.
- For additional information on separated bike lane width, see page 36.
- To determine priorities in constrained corridors, see page 37.

CONSIDERATIONS

Sidewalk level bike lanes:

- May encourage pedestrian and bicyclist encroachment unless discouraged with a continuous sidewalk buffer.
- Maximize usable bike lane width by allowing temporary bicycle use of street or sidewalk buffer.
- Requires no transition for raised bicycle crossings at driveways, alleys or streets.
- Allows use of bike lane as a level landing area for bus stops in constrained corridors with narrow street buffers.
- May reduce maintenance needs by preventing debris build-up from roadway run-off.
- May simplify snow plowing operations.
- Allow bicyclists to use a portion of the sidewalk or street buffer to pass other bicyclists in constrained corridors where sidewalk buffers are eliminated.
- Require special attention to transition the contra-flow bicyclist into existing bike lanes and shared travel lanes.

REFERENCES


NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.

SEPARATED BIKE LANES: TWO-WAY AT INTERMEDIATE LEVEL

This treatment provides an exclusive, bidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements at an elevation below the sidewalk, but above the street.

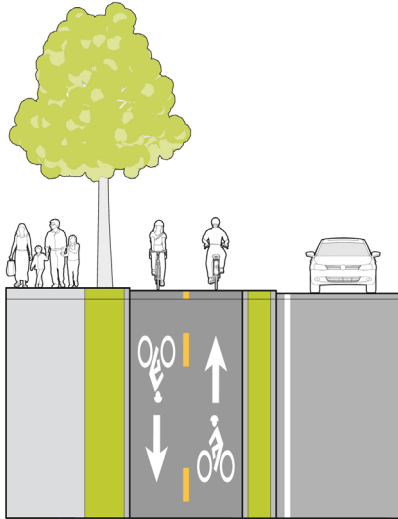

TYPICAL APPLICATION

- Roadway is greater than 4 lanes in width.
- Both sides of two-way street where destinations exist on both sides and crossing spacing is infrequent.
- Right side of one-way streets.

GUIDANCE

- A minimum curb reveal of 2-3 inches below sidewalk level is required to provide a detectable edge for visually impaired pedestrians. Three inches is the county standard.
- The recommended minimum width is 10 feet, which allows for passing.
- A constrained bike lane width of 8 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane may only occur for the length of the transit stop or accessible parking space(s).

- For additional information on separated bike lane width, see page 36.
- To determine priorities in constrained corridors, see page 37.

CONSIDERATIONS

Intermediate level bike lanes:

- Create a separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Ensure a detectable edge is provided for people with vision disabilities.
- May reduce maintenance needs by preventing debris build-up from roadway run-off.
- May complicate snow plowing operations.
- May require careful consideration of drainage design and in some cases may require catch basins to manage bike lane run-off.
- Require special attention to transition the contra-flow bicyclist into existing bike lanes and shared travel lanes.

REFERENCES


NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

FHWA. *Separated Bike Lane Planning and Design Guide*. 2015.

SEPARATED BIKE LANES: TWO-WAY AT STREET LEVEL

This treatment provides an exclusive, bidirectional operating space for bicyclists between the street and sidewalk that is physically separated from motor vehicles and pedestrians by vertical and horizontal elements located at the same elevation as the street.

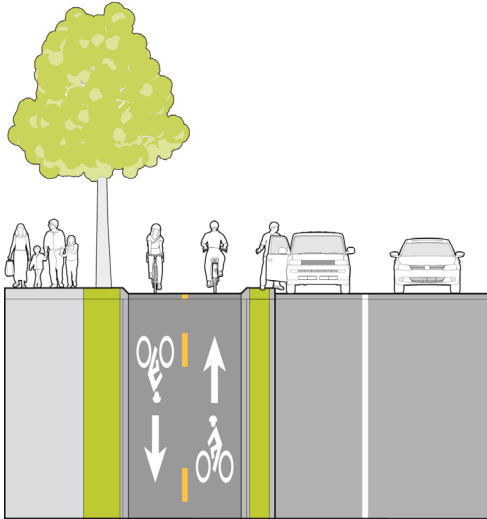

TYPICAL APPLICATION

- Roadway is greater than 4 lanes in width.
- Both sides of two-way street where destinations exist on both sides and where crossing spacing is infrequent.
- Right side of one-way streets.

GUIDANCE

- The recommended minimum width is 10 feet, which allows for passing.
- A constrained bike lane width of 8 feet may be used for short distances immediately adjacent to transit stops or accessible parking spaces to navigate around them. This constrained bike lane may only occur for the length of the transit stop or accessible parking space(s).
- For additional information on separated bike lane width, see page 36.
- To determine priorities in constrained corridors, see page 37.

CONSIDERATIONS

Street level bike lanes:

- Create a separation between bicyclists and pedestrians where sidewalk buffers are eliminated.
- Ensure a detectable edge is provided for people with vision disabilities.
- May increase maintenance needs to remove debris from roadway run-off unless street buffer is raised.
- May complicate snow plowing operations.
- May require careful consideration of drainage design and in some cases may require catch basins to manage bike lane run-off.
- Require special attention to transition the contra-flow bicyclist into existing bike lanes and shared travel lanes.

REFERENCES

- NACTO. Urban Bikeway Design Guide. 2nd Edition.*
- MassDOT. Separated Bike Lane Planning and Design Guide. 2015.*
- FHWA. Separated Bike Lane Planning and Design Guide. 2015.*

NEIGHBORHOOD GREENWAY TREATMENTS

7 AM - 9:30 AM

2 PM - 6 PM

COMOX-HELMCKEN GREENWAY

1000



Comox St.



TRAFFIC CALMING VIA RAISED PAVEMENT

Vertical traffic calming forces motorists to drive at slower speeds. These treatments lower the speed differential between bicyclists and cars, increasing bicyclist comfort. They are typically used where traffic controls are less frequent, for instance, along a segment where stop signs may have been removed to ease bicyclist travel.



Speed cushion



Speed hump



Raised crosswalk



Curve profile options

TYPICAL APPLICATION

Vertical traffic calming is not necessary on all neighborhood greenways. It should be considered where a street meets the criteria identified by the Montgomery County Department of Transportation for traffic calming.

GUIDANCE

Continuous devices, such as speed humps and raised crosswalks, are more effective to achieve slower speeds than speed cushions.

CONSIDERATIONS

- Speed humps and raised crosswalks affect bicyclist comfort. The approach profile should preferably be flat-topped, but sinusoidal and circular profiles are acceptable.
- Where traffic calming must not slow an emergency vehicle, speed cushions or raised crosswalks should be considered. Speed cushions provide gaps spaced for an emergency vehicle's wheelbase to pass through without slowing. These gaps also provide a space for bicyclists to pass through unabated.
- Consider using raised crosswalks at intersections to slow traffic turning onto the neighborhood greenway from a major street.

TRAFFIC CALMING VIA STREET NARROWING

Horizontal traffic calming reduces speeds by narrowing lanes, creating a sense of enclosure and additional friction between passing vehicles. Narrower conditions require more careful maneuvering around fixed objects and when passing bicyclists or oncoming automobile traffic. Some treatments may slow traffic by requiring motorists to yield to oncoming traffic.



Chicane



Neckdown



Curb extension



Neighborhood traffic circle

TYPICAL APPLICATION

Street segments or intersections where street width contributes to higher motor vehicle speeds. Especially where:

- On-street parking has low rate of occupancy during most times of day.
- There is desire to remove or decrease stop control at a minor intersection.

GUIDANCE

Horizontal treatments are most effective if they deflect motorists midblock (with chicanes) or within intersections (with neighborhood traffic circles).

CONSIDERATIONS

- Must be designed to deflect motor vehicle traffic without forcing the bicycle path of travel to be directed into a merging motorist.
- Neighborhood traffic circles should be considered at local street intersections to prioritize the through movement of bicyclists (by removing stop control or converting to yield control) without increasing motorist speeds.
- Costs for infrastructure will range depending on complexity and permanence of design. Simple, interim treatments, such as striping and flexposts are low-cost. Curbed, permanent treatments that integrate plantings or green infrastructure are higher cost.

REFERENCES

IPBI, Alta Planning + Design, Portland State University. *Bicycle Boulevard Planning and Design Guidebook*. 2009.

NACTO. *Urban Bikeway Design Guide*. 2nd Edition.

Portland Bureau of Transportation. *Neighborhood Greenway Assessment Report*. 2015.

TRAFFIC DIVERSION

Traffic diversion strategies are used to reroute traffic from a neighborhood greenway onto other adjacent streets by installing design treatments that restrict motorized traffic from passing through.



Partial closure - permanent, signalized



Diagonal diverter



Partial closure - interim, stop-control



Full closure

TYPICAL APPLICATION

- Diversion can be used to reduce motor vehicle traffic on neighborhood greenways to desired volumes:
 - Preferred: 1,000 - 1,500 vehicles per day.
 - Acceptable: up to 3,000 vehicles per day.

GUIDANCE

- Diversion treatments must be designed to provide a minimum clear width of 6 feet for a bicyclist to pass through.
- Some treatments may require a separate pedestrian accommodation.

CONSIDERATIONS

- Diversion is most applicable in areas with a grid of streets to disperse traffic and may not be appropriate in some areas of Montgomery County.
- Diversion shifts trips from the neighborhood greenway onto adjacent streets. This change in traffic volume on other local streets must be identified and addressed during the planning, design and evaluation process.
- Where motor vehicle volumes are already within the desired range, diversion may be considered to maintain desired volumes.
- Temporary materials may be used to test diversion impacts before permanent, curbed diverters are installed.
- Consultation with emergency services will be necessary to understand their routing needs.

REFERENCES

- IPBI, Alta Planning + Design, Portland State University. *Bicycle Boulevard Planning and Design Guidebook*. 2009.
- NACTO. *Urban Bikeway Design Guide*. 2nd Edition.
- Portland Bureau of Transportation. *Neighborhood Greenway Assessment Report*. 2015.

CROSSING TREATMENTS

While the street segments of a neighborhood greenway may be generally comfortable for bicyclists without significant improvement, major street crossings must be addressed to provide safe, convenient and comfortable travel along the entire route. Treatments provide waiting space for bicyclists, control cross traffic or ease bicyclist use by removing traffic control for travel along the neighborhood greenway route.



Off-set intersection bicyclist left turn median diverter



Bicycle box with lead-in bike lane



HAWK beacon



Offset crossing left turn box with lead-in bike lane

TYPICAL APPLICATION

Intersections along a neighborhood greenway route may need treatment in the following situations:

- Unsignalized crossings of arterial or collector streets with high traffic volumes and speeds.
- Offset intersections where the greenway route makes two turns in short succession.
- Two-way stop-controlled intersections where the traffic calming benefit of the stop control is not needed for motor vehicle traffic.

GUIDANCE

Medians should be a minimum of 6 feet in width, although 8 feet is desirable to allow adequate space for a person to wait with bicycle.

CONSIDERATIONS

- Adjustments to traffic control such as a high-intensity activated crosswalk (HAWK) beacon or stop sign adjustments may necessitate a traffic study. HAWK signals are not currently approved for use in Maryland.
- Median islands may be constructed to require right-in/right-out turns by motor vehicles while still allowing left turns by bicyclists at off-set intersections.
- Numerous treatments exist to accommodate offset intersection crossings and the full range of design treatments should be considered in these situations. These treatments include left turn queue boxes, two-way center left turn lanes, median left turn pockets and short sidepath segments.

REFERENCES

- IPBI, Alta Planning + Design, Portland State University. *Bicycle Boulevard Planning and Design Guidebook*. 2009.
- NACTO. *Urban Bikeway Design Guide*. 2nd Edition.
- Portland Bureau of Transportation. *Neighborhood Greenway Assessment Report*. 2015.


- **THIS PAGE IS INTENTIONALLY LEFT BLANK**

FREEWAY CROSSING TREATMENTS



OVERPASS/UNDERPASS BETWEEN INTERCHANGES ALONG AN EXISTING ROAD

This treatment indicates how bikeways can cross a freeway adjacent to a roadway, such as Wootton Parkway at Interstate 270.

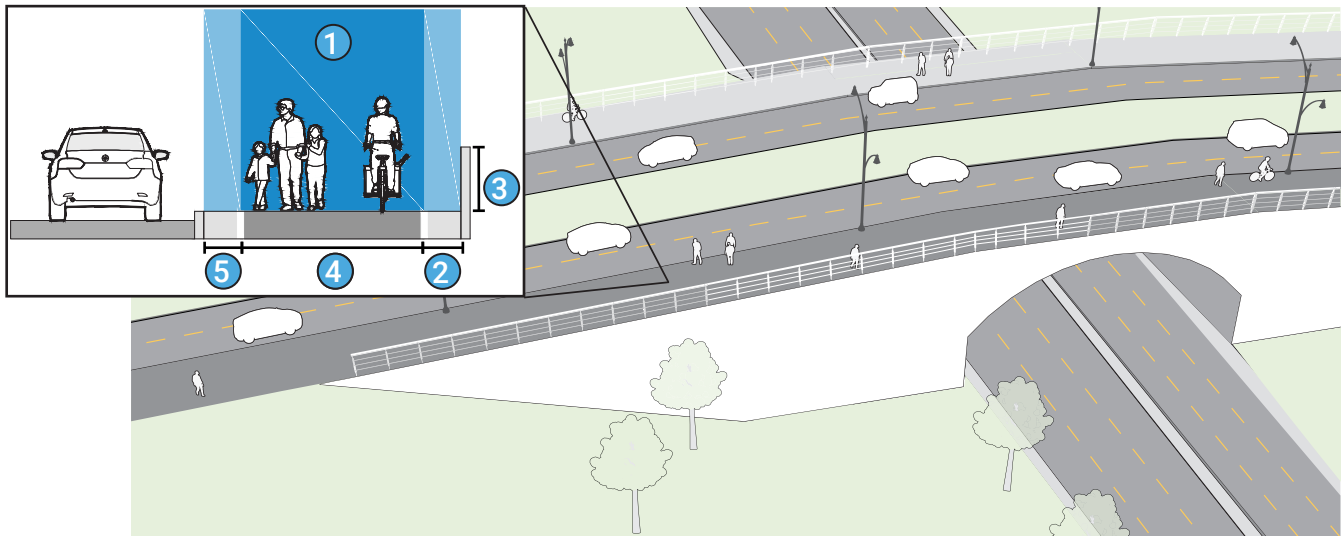

Typical Application

- The preferred way to cross an access-controlled highway where a bikeway parallels an existing roadway.

CONSIDERATIONS

- When connecting through an underpass, lighting can be necessary even during daylight hours and can provide a sense of personal security.
- Overpasses freeze before facilities on ground and underpasses do not get the benefit of sunlight to melt ice.

GUIDANCE

- 1 Bicycle and pedestrian operating space.
- 2 Provide 2' min. clear space from wall or railing.
- 3 Provide 42" min. wall or railing height.
- 4 Can be implemented as a sidepath or separated bike lanes and a sidewalk. For sidepath width, see page 10. For separated bike lane width, see page 36.
- 5 Provide 2' min. (6' desirable) buffer.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2019.

OVERPASS/UNDERPASS BETWEEN INTERCHANGES ON A TRAIL

This treatment indicates how bikeways can cross a freeway on a trail, such as the Bethesda Trolley Trail at Interstate 270.



TYPICAL APPLICATION

The preferred way to cross a freeway where a bikeway is planned to cross a freeway away from a roadway.

CONSIDERATIONS

- When connecting through an underpass, lighting can be necessary even during daylight hours and can provide a sense of personal security.
- Overpasses freeze before facilities on ground and underpasses do not get the benefit of sunlight to melt ice.
- If the overpass is not fully enclosed, the minimum wall or railing height is 42”.

GUIDANCE


- 1 Bicycle and pedestrian operating space.
- 2 Provide 2' min. clear space from wall or railing.
- 3 Can be implemented as a sidepath or separated bike lanes and a sidewalk. For sidepath width, see page 10. For separated bike lane width, see page 36.
- 4 Maintain 8' min. (10' desirable) vertical clearance.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2019.

SIGNALIZED TREATMENTS AT ENTRANCE RAMPS

This treatment indicates how sidewalks, sidepaths and separated bike lanes should cross signalized entrance ramps of interstates and other high-speed roadways. It should be considered when overpasses or underpasses are not feasible.

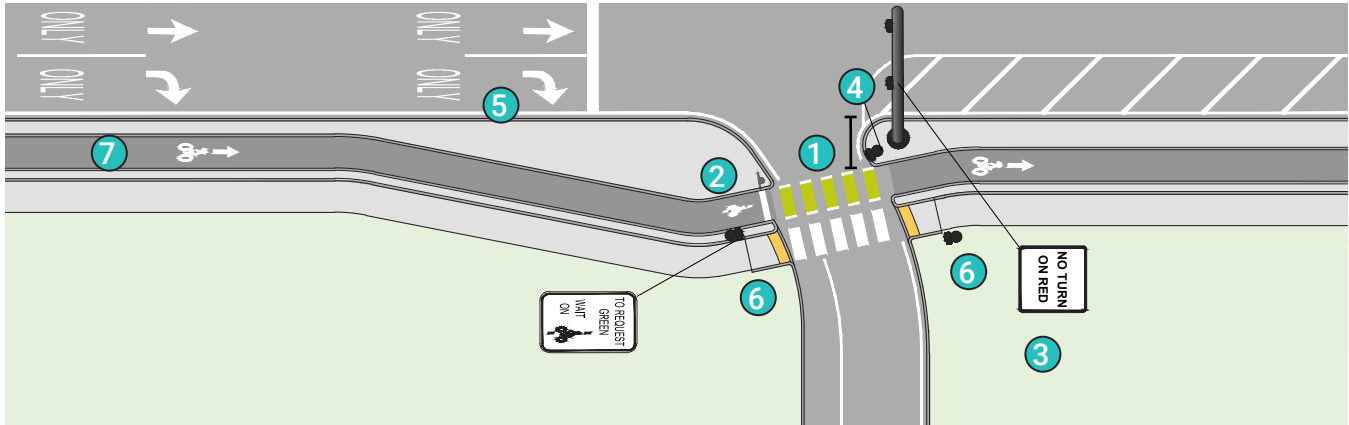

TYPICAL APPLICATION

Freeway and high-speed roadway entrances present significant difficulties for crossing bicyclists. Motorists expect to accelerate to freeway speeds at entrance ramps. The goal of signaling entrance ramps is to minimize conflicts between motor vehicles, bicyclists and pedestrians while maximizing visibility between all modes in constrained right-of-way.

GUIDANCE

- 1 The motorist yield zone should be 6 feet (min) and 20 feet (preferred) to create space for a turning motorist to yield to a through-moving bicyclist or pedestrian.
- 2 Provide bicycle detection to recall the bicycle through movement.
- 3 Install No Right Turn on Red Sign.
- 4 Install Bicycle Signal.
- 5 Right-turning vehicles have a dedicated turn lane, which allows for queuing and separate signal phasing.
- 6 Install Pedestrian Signal with push button.
- 7 Provide Advance Bicycle Detection.

REFERENCES


AASHTO. *Guide for the Development of Bicycle Facilities*. 2019.
MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

CONSIDERATIONS

- Provide adequate signal timing for bicyclists and pedestrians to completely clear intersections before permitting conflicting movements to proceed.
- Prioritize the shortest crossing distance rather than a direct path of travel to reduce exposure to opposing traffic. This generally results in a perpendicular crossing.
- Bicycle detection is necessary so the bicycle through movement is only recalled when bicyclists are present.
- Right-turning vehicles, bicyclists and pedestrians should not occupy the crossing at the same time.
- Consider directionality of pedestrian and bicycle travel when designing and placing signals and signs.
- For situations where there is not a dedicated right turn lane, bicycle detection is necessary because it minimizes vehicle delay by only recalling the bicycle signal when a bicyclist is present.
- It is acceptable for bicycle and pedestrian signal heads to share the same pole as long as the faces are visible to both approaches.
- Bicycles may proceed on pedestrian signal if bicycle signal is not provided. Use R9-5 sign.
- The crossing can be recessed beyond 20' if the intersection allows Right Turns on Red or it is anticipated that motorists will violate signals.

SIGNALIZED TREATMENTS AT EXIT RAMPS

This treatment indicates how sidewalks, sidepaths and separated bike lanes should cross signalized exit ramps of interstates and other high-speed roadways. It should be considered when overpasses or underpasses are not feasible.

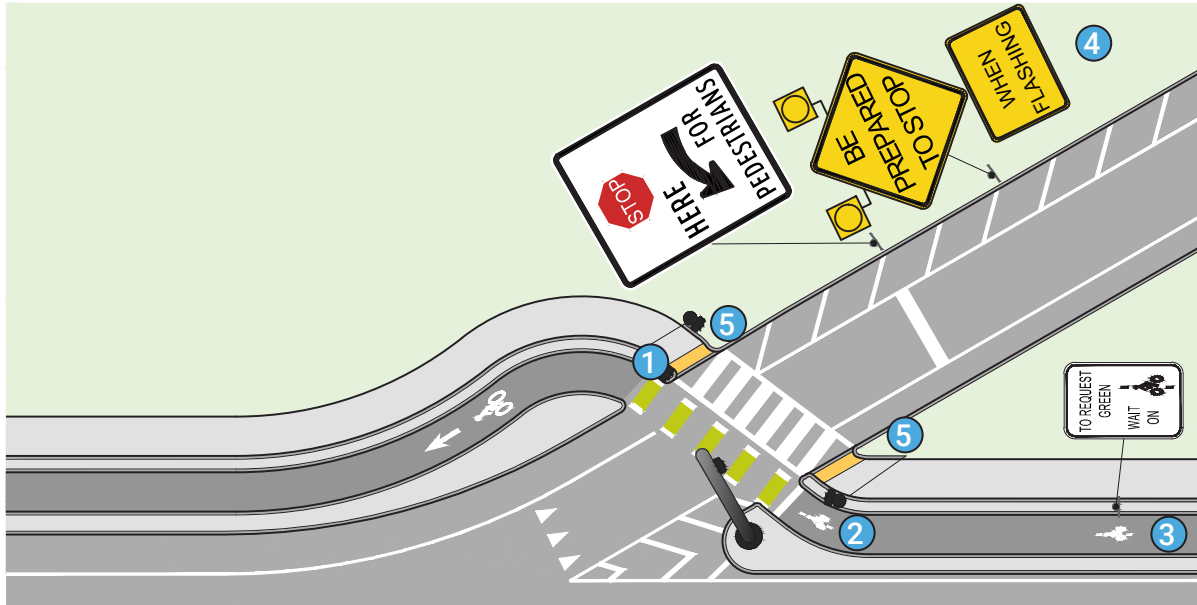

TYPICAL APPLICATION

Exit ramps present significant difficulties for crossing bicyclists. Motorists may be more focused on finding a gap to merge into traffic at exit ramps and less aware of bicyclists. The goal of signalization is to minimize conflicts between motor vehicles, bicyclists and pedestrians while maximizing visibility between all modes in constrained right-of-way. Signalization is desirable at locations where sight distance is insufficient, speeds are too high (>30mph) and where motorists have their own receiving lane.

GUIDANCE

- 1 Install Bicycle Signal.
- 2 Provide bicycle detection to trigger red signal for exiting motor vehicles.
- 3 Provide Advance Bicycle Detection.
- 4 Provide (optional) Advance Warning Beacon linked to pedestrian and bicycle detection.
- 5 Install Pedestrian Signal.


CONSIDERATIONS

- Provide adequate signal timing for bicyclists and pedestrians to completely clear intersections before permitting conflicting movements to proceed.
- Prioritize the shortest crossing distance rather than a direct path of travel to reduce exposure to opposing traffic. This generally results in a perpendicular crossing.
- Consider directionality of pedestrian and bicycle travel when designing and placing signals and signs.
- It is acceptable for bicycle and pedestrian signal heads to share the same pole as long as the faces are visible to both approaches.
- Bicycles may proceed on pedestrian signal if bicycle signal is not provided. Use R9-5 sign.
- There should be space for one car between the merge point and the crossing to separate the two motorist actions.
- The signal can be set to require actuation, where it is only called when bicyclists or pedestrians are present.

AASHTO. *Guide for the Development of Bicycle Facilities*. 2019.

UNSIGNALIZED TREATMENTS AT ENTRANCE RAMPS

This treatment indicates how sidewalks, sidepaths and separated bike lanes should cross unsignalized entrance ramps of interstates and other high-speed roadways. The goal of geometric changes is to minimize conflicts between motor vehicles, bicyclists and pedestrians while maximizing visibility between all modes where signalization is not provided. This treatment should be considered when overpasses, underpasses and signalized ramps are not feasible.

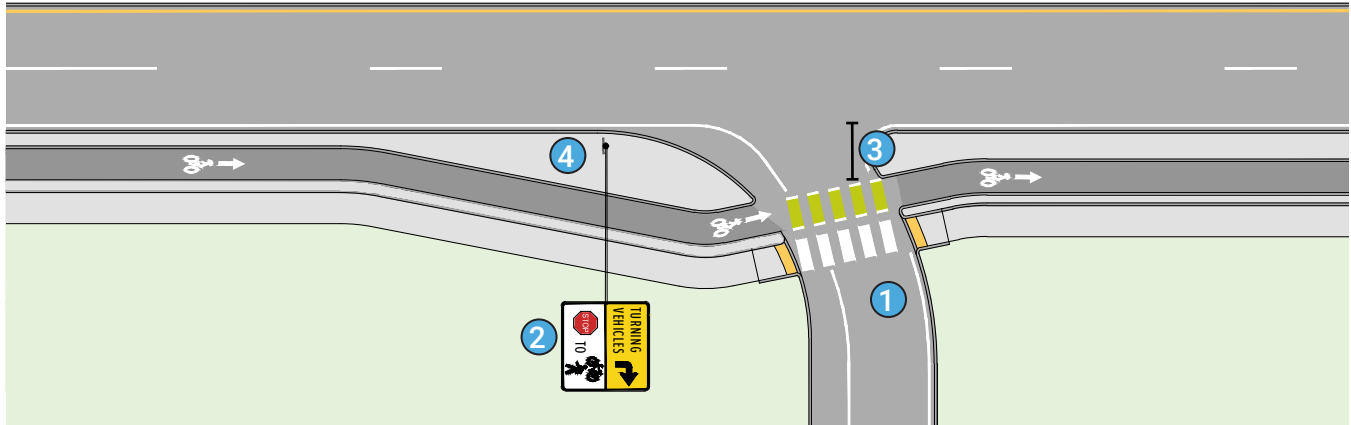

TYPICAL APPLICATION

Freeway and high-speed roadway entrances present significant difficulties for crossing bicyclists and pedestrians. Motorists expect to accelerate to freeway speeds at entrance ramps. Unsignalized treatments without active warning should be considered only on roads with lower speeds, lower volumes, and low-volume right turns, as it provides the least amount of protection for bicyclists and pedestrians.

GUIDANCE


- 1 Ramp geometry of unsignalized entrance ramps should be no less than 30 degrees from the roadway, to control motorist speed across the ramp.
- 2 Install Turning Vehicles Stop for Bikes and Pedestrians Sign.
- 3 Motorist yield zone should be 6 feet (min) and 20 feet (preferred) to create space for a turning motorist to yield to a through-moving bicyclist or pedestrian.
- 4 Taper to create more space between turning vehicles and the bicycle crossing.

CONSIDERATIONS

- Consider the conflicting priorities of crosswalk placement across the ramp: providing the shortest crossing distance rather than a direct path of travel as well as sight lines for turning vehicles.
- Minimize the turning speed of motor vehicles using shortest curb radii practicable. Consider the use of a mountable truck apron where conflicts with bicyclists and pedestrians are likely and turning motorist speeds are not likely to result in yielding to people in crossings.
- Provide (optional) raised crossing.
- Consider installing a truck apron within the shoulder to narrow the crossing and slow motorists.

UNSIGNALIZED TREATMENTS AT EXIT RAMPS

This treatment indicates how sidewalks, sidepaths and separated bike lanes should cross unsignalized exit ramps of interstates and other high-speed roadways. The goal of geometric changes is to minimize conflicts between motor vehicles, bicyclists and pedestrians while maximizing visibility between all modes where signalization is not provided. This treatment should be considered when overpasses, underpasses and signalized ramps are not feasible.

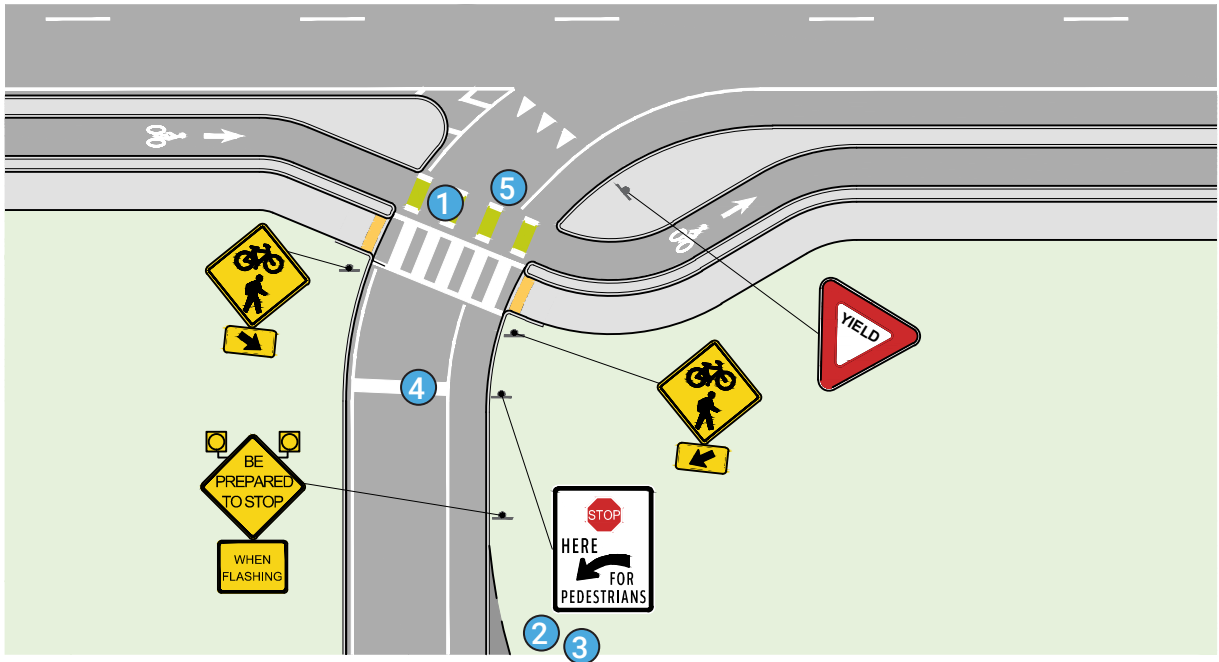

TYPICAL APPLICATION

Freeway and high-speed roadway exits present significant difficulties for crossing bicyclists and pedestrians. Motorists may be more focused on finding a gap to merge into traffic at exit ramps and less aware of bicyclists. Unsignalized treatments without active warning should be considered only on roads with lower speeds, lower volumes, and low-volume right turns, as it provides the least amount of protection for bicyclists and pedestrians.

GUIDANCE

- 1 Design the bike lane to intersect the exit ramp at an angle between 60 and 90 degrees.
- 2 Provide active warning to increase likelihood of motorist yielding.
- 3 Install Bicycles and Pedestrians Ahead signage.
- 4 Install Stop Bar.
- 5 This space should provide for one vehicle to not block the crossing or the motor vehicle lane.

CONSIDERATIONS

- Provide (optional) raised crossing.
- Prioritize the shortest crossing distance rather than a direct path of travel to reduce exposure to opposing traffic.
- Crossings should be located where the bicyclist and motorist have good lines of sight before the motorists' attention is entirely focused on merging with traffic.
- Minimize the turning speed of motor vehicles using shortest curb radii practicable. Consider the use of a mountable truck apron.
- Consider installing a truck apron within the shoulder to narrow the crossing and slow motorists.
- A Rectangular Rapid Flash Beacon (RRFB), should be considered where sight lines are restricted or where traffic volumes are high and gaps in vehicle traffic are insufficient.




OTHER



FLOATING TRANSIT ISLAND

Where feasible, separated bike lanes should be located behind bus stops to eliminate conflicts between bicyclists and buses. This treatment is compatible with near-side, far-side and mid-block bus stop locations.

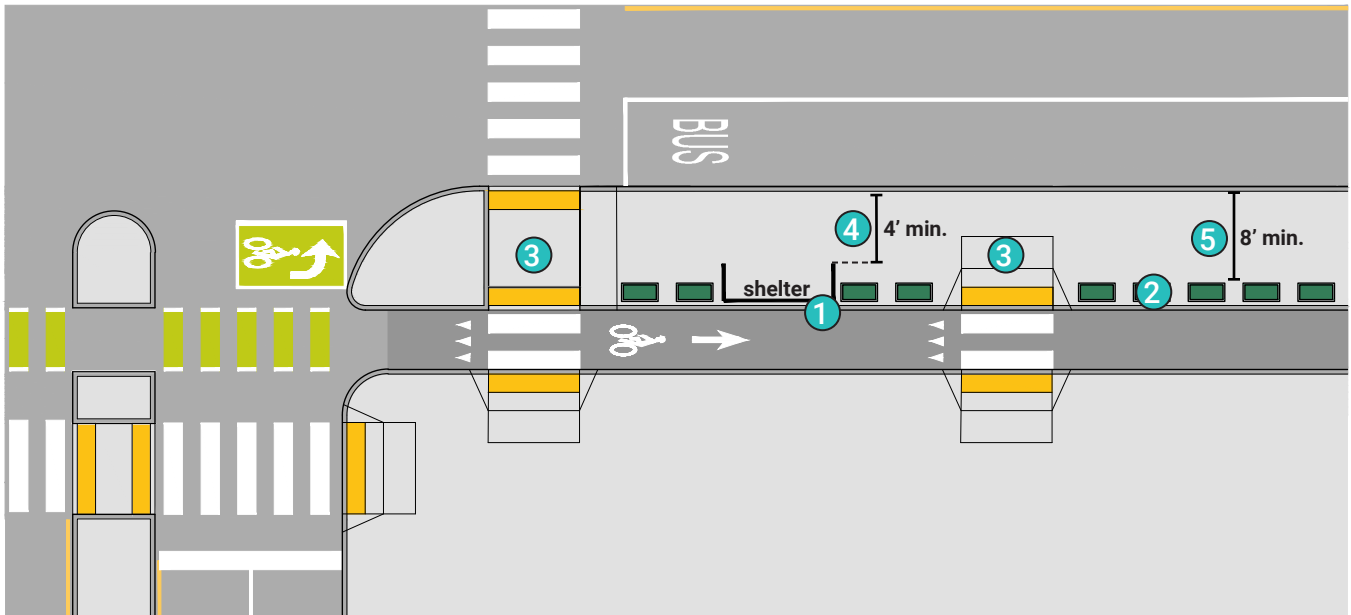

Typical Application

Floating transit islands eliminate the conflict between bicyclists traveling in conventional bike lanes and buses that must pull into conventional bike lanes to load and unload passengers.

Guidance

- 1 Provide a buffer of 6"-12" between the bus shelter and the bike lane. This buffer is narrower than the shy distance normally used for vertical surfaces (2'), but this is okay for short distances in constrained spaces.
- 2 Channelizing railings, planters or other treatments can be used to help direct people to the crossing location(s).
- 3 Multiple pedestrian crossings are recommended, but not required.
- 4 Provide a minimum 4-foot-wide walkway between the curb and the transit shelter.
- 5 Minimum 8-feet of clear width at the location where the bus doors will open to accommodate persons in wheelchairs.

Considerations

- The space between the bike lane and the sidewalk must have a detectable edge so pedestrians with vision disabilities can distinguish between the two. The bike lane may be located at street-level, intermediate-level, or sidewalk-level. The bike lane elevation can affect the treatment used and can itself be a treatment for creating the detectable edge. The following design treatments can help provide this tactile cue:
 - Street furniture or other vertical objects.
 - A curb.
 - Curb height changes.
 - Continuous low landscaping.
 - A directional indicator (in accordance with International Standard 23599) installed linearly on the sidewalk adjacent to the edge.
- Consider bus queuing and bus length to determine island length and pedestrian crossing placement.
- Ensure visibility between bicyclists and pedestrians for safety.
- Consider raised pedestrian crossings between the floating transit island and the sidewalk to prioritize pedestrians.

REFERENCES

AASHTO. *Guide for the Development of Bicycle Facilities*. 2019.

MassDOT. *Separated Bike Lane Planning and Design Guide*. 2015.

MONTGOMERY COUNTY PLANNING DEPARTMENT
BICYCLE FACILITY DESIGN TOOLKIT
MAY 2018

MONTGOMERYPLANNING.ORG/BIKEPLAN